



**LIGHT^{MY}
BRICKS**



LEGO[®] AT-TE WALKER #75337

LIGHT KIT

INSTALLATION GUIDE

Light My Bricks



LEGO® AT-TE WALKER 75337 INSTALLATION GUIDE

Hi There!

We're here to help you get started on the LEGO®
AT-TE Walker 75337 Light Kit.

This PDF details the instructions for the LED light kit only.

If you run into any issues, please refer to the
troubleshooting section towards the end of this guide.

Have fun and enjoy!

INSTALLATION GUIDE





PACKAGE CONTENTS:



8 x Blue 30cm Bit Light *
5 x Cool White 15cm Bit Light
2 x Red Strip Light



1 x 8-Port Expansion Board
1 x 6-Port Expansion Board
1 x 2-Port Expansion Board
2 x Gun Effects Board



5 x 15cm Connecting Cable *
2 x 5cm Connecting Cable



1x USB Power Cable
(Power Source not Included)

ASSORTED BRICKS:



- 1x Plate 2x2 w/ Rounded Bottom - Trans Clear
- 2x Bracket 1x2 - 1x2 - Black

* Indicates components which include spares

Contents

Before You Begin	5
Blueprint	10
Instructions	11
Final Product	38
Troubleshooting	39
Contact	43


Before You Begin

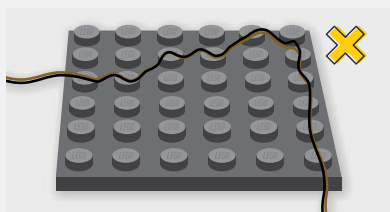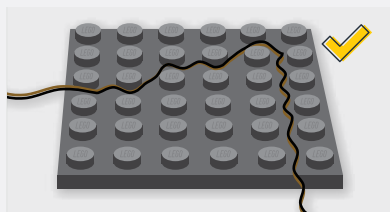

Laying cables in between and underneath bricks

Cables can fit in between and underneath LEGO® bricks, plates, and tiles providing they are laid correctly between the LEGO® studs. Do NOT forcefully join LEGO® together around cables; instead ensure they are laying comfortably in between each stud.

CAUTION: Forcing LEGO® to connect over a cable can result in damaging the cable and light.

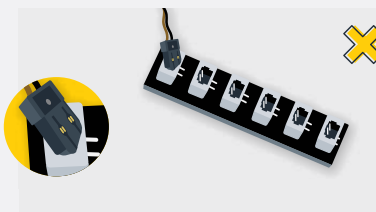


Connecting Cable Connectors To Expansion Boards

Take extra care when inserting connectors to ports of Expansion Boards. Connectors can be inserted only one way. With the expansion board facing up, look for the soldered “=” symbol on the left side of the port. The connector side with the wires exposed should be facing toward the soldered “=” symbol as you insert into the port. If a plug won’t fit easily into a port connector, do not force it.

Incorrectly inserting the connector can result in bent pins inside the port or possible overheating of the expansion board when connected.

Before You Begin

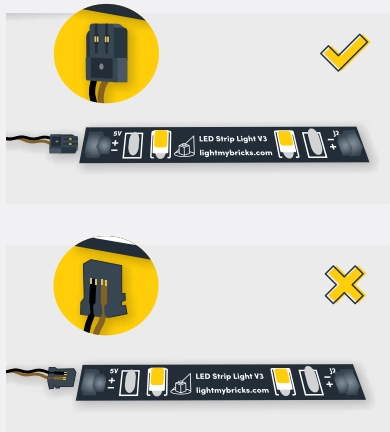

Connecting Cable Connectors To Strip Lights

Take extra care when inserting connectors to ports on the Strip Lights. Connectors can be inserted only one way. With the Strip Light facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, don't force it. Doing so will damage the plug and the connector.




Connecting Micro Cable Connectors To Micro Expansion Board Ports

Take extra care when inserting the micro connectors to micro ports of Micro Expansion Boards. Connecting Micro Bit Lights to Micro Expansion Boards is similar to connecting lights and cables to Strip Lights. With the expansion board facing up, ensure the side of the connector with the wires exposed is facing down. If a plug won't fit easily into a port connector, do not force it. Use your fingernail to push the plastic part of the connector to the micro port.

Before You Begin

Installing Bit Lights Under Lego® Bricks And Plates

When installing Bit Lights under LEGO® pieces, ensure they are placed the correct way up (Yellow LED component exposed). You can either place them directly on top of LEGO® studs or in between.

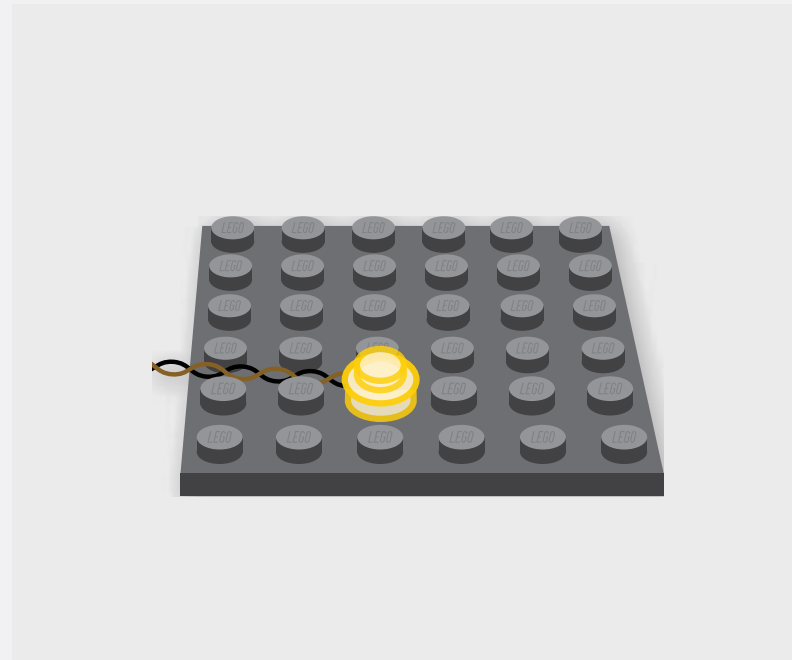

Before You Begin

The Symbols Used In This Guide

When going through the following guide you will come across symbols and formats that will assist with the installation of your light kit. Take notice of them as each has a specific purpose.

Light Kit Component

This is the most important image format as it indicates which part to use from the Light Kit. Make sure you pay close attention to which part is shown.

White 30cm Bit Light



Connect

Used when you need to connect a LEGO piece or LMB component.



Disconnect

Used when you need to remove a LEGO piece/ section or LMB component.



Directional

Used to show where to route cables, place components, or move them.



Bend/Pivot

Used when a component needs to be bent, or part folded or pivoted.



Turn/ Flip

Will be found in the top left corner when the set needs to be rotated or flipped.



Twist/ Braid

Seen when a set of cables need to be grouped and twisted together.



Power On Test

Found at the end of a major step to test the lights. Will be located in the top left corner.



Note

Notes will be found alongside the instruction photos and explain what to do.



Before You Begin

Repeat Step

Repeat the previous step eg. Make a spotlight, then make a second spotlight.

x2

Connect Focus

Used to highlight a hard to see area where a component is being connected.



Disconnect Focus

Used to highlight a hard to see area where a component is being disconnected.



General Focus

Used to highlight a hard to see area where a component needs to be acted on.



General Note


This is a sample note that is used anywhere in this guide. It will explain a difficult section where photos are hard to illustrate or easily confused.

Connect Note


The green coloured note is used when the topic focuses on a component being connected, like the shown Power Bank.


Disconnect Note

The red coloured note is used when the topic focuses on a component being disconnected or like here, the removed pieces.


NOTE


Take the 5cm Connecting Cable from the 4-Port Micro Expansion Board and route it into the "IN" port of the Flicker Effects Board

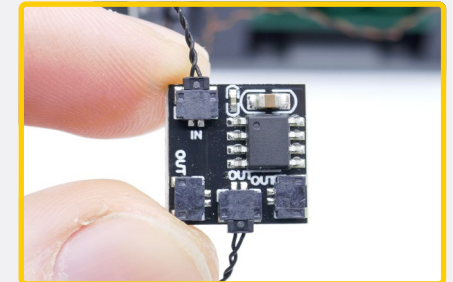



NOTE

Connect to a 5V USB Power Bank, 5V USB Wall Adaptor, or USB to AA Battery Pack (sold separately)





NOTE

You should have these parts left over that were removed from the LEGO set

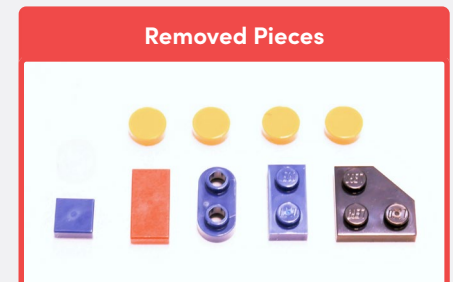



BLUEPRINT

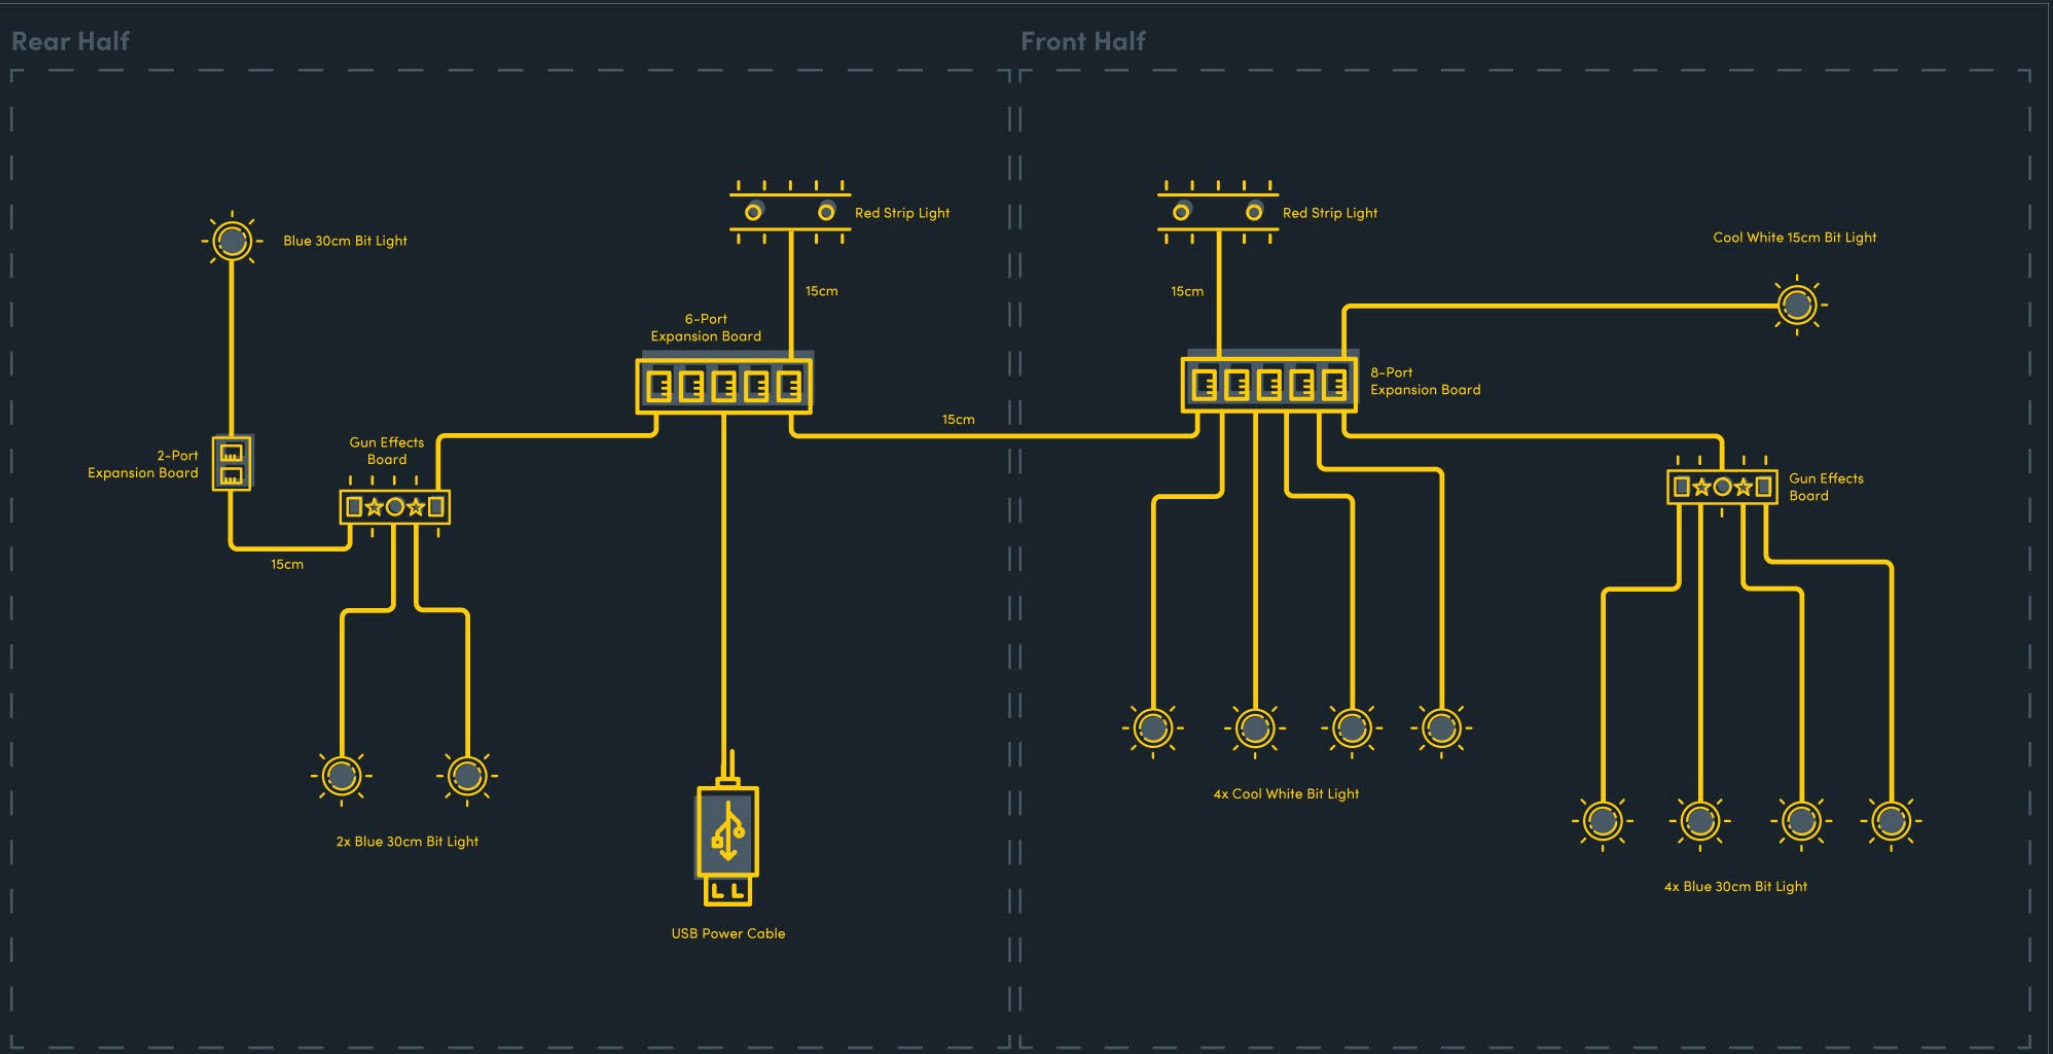



INSTRUCTIONS

To ensure a smooth installation of your light kit, please read and follow each step carefully. If you run into any issues, please refer to the online troubleshooting guide.



LEGEND:  DISCONNECT

 CONNECT / RECONNECT



TURN / FLIP



DIRECTIONAL



TWIST / BRAID



POWER ON / TEST



LEGENDE:  TRENNEN

 VERNINDEN / WIEDERVERBINDEN



WENDEN / KIPPEN



DIRECTIONAL



DREHEN / VERDREHEN



EINSCHALTEN / TESTEN



LÉGENDE:  DÉCONNECTER

 CONNECTER / RECONNECTER



TOUR / INCLINAISON



DIRECTIONNEL



TORSION / TRESSER



POWER ON / TEST



LEGGENDA:  SCOLLEGARE

 CONNETTI / RICONNETTI



ROTARE / INCLINARE



DIREZIONALE





















TWIST / TRECCIA














POWER ON / TEST







1

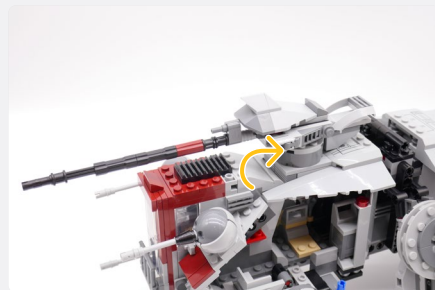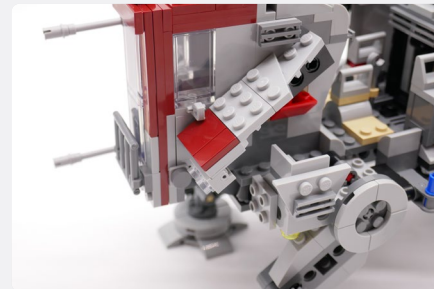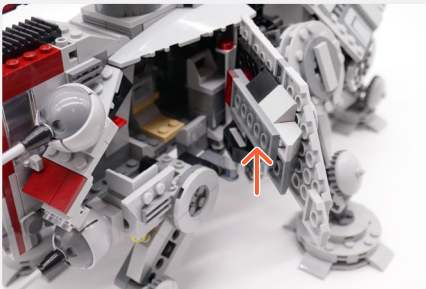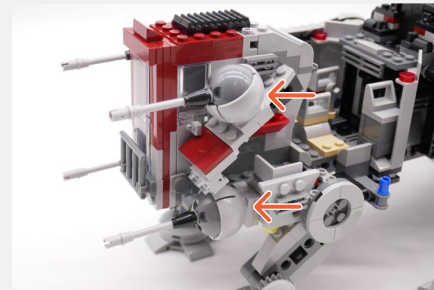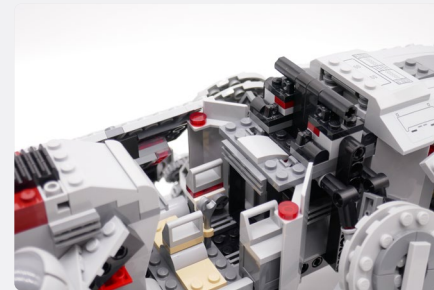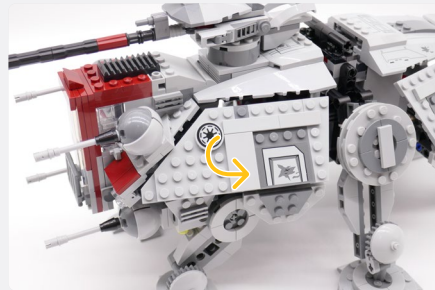

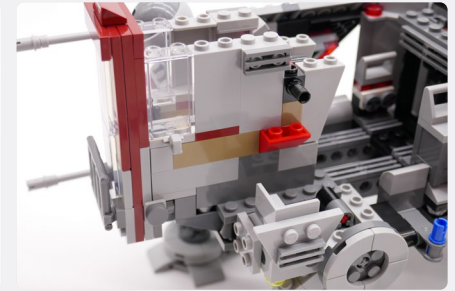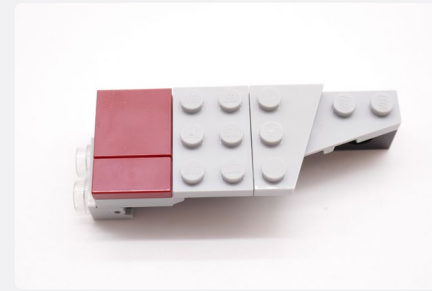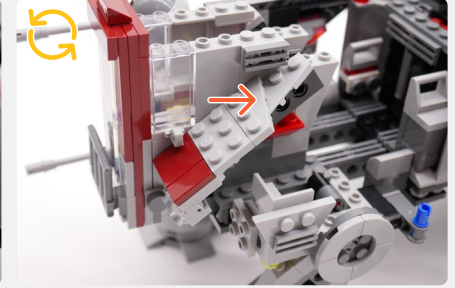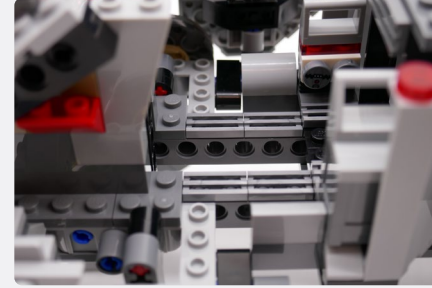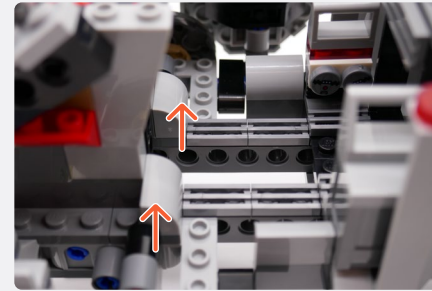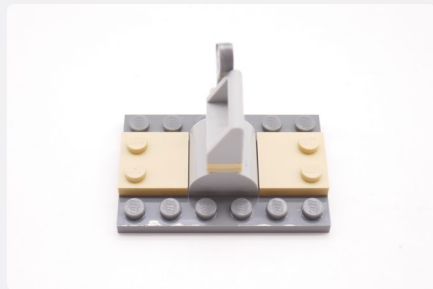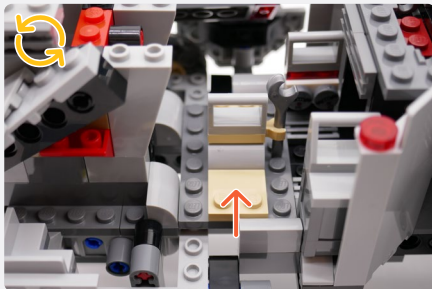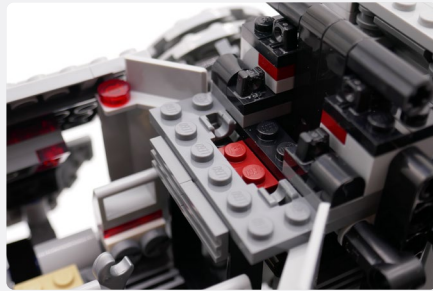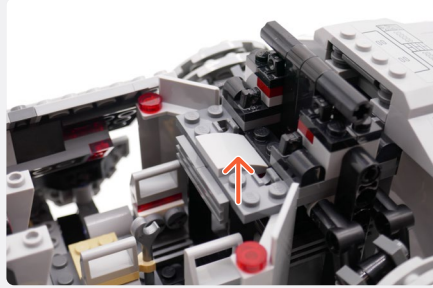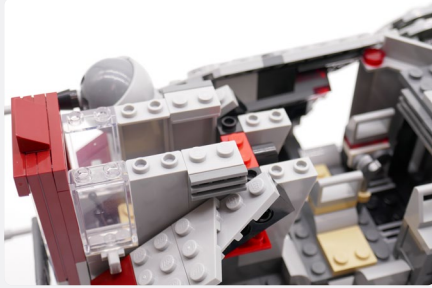
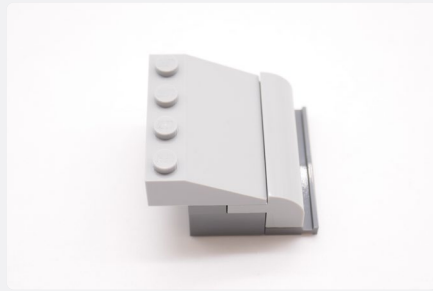
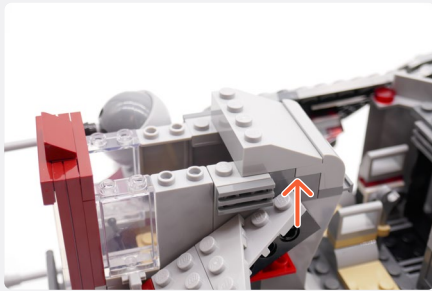


2

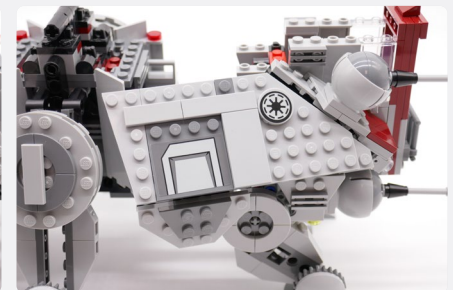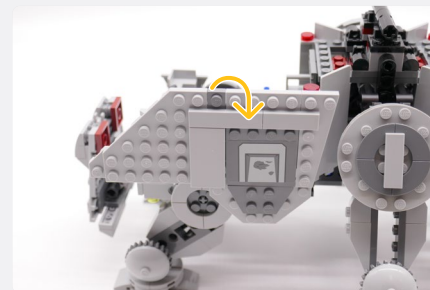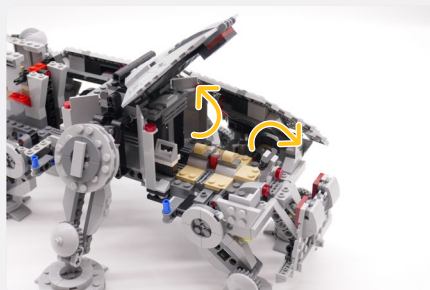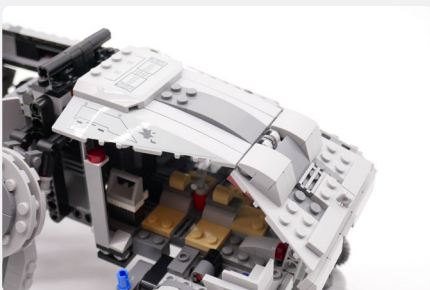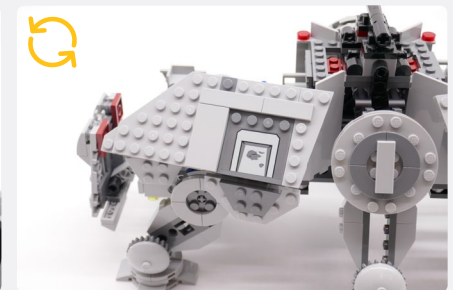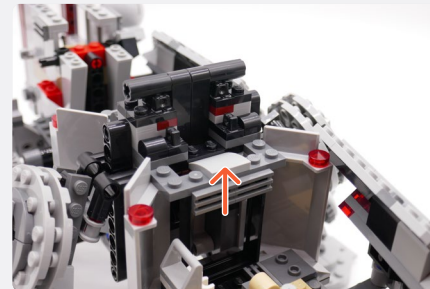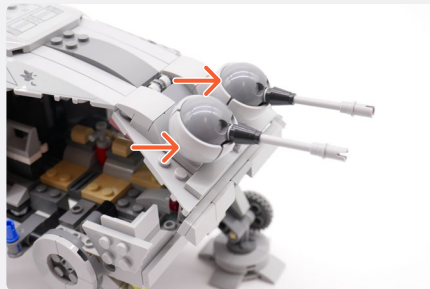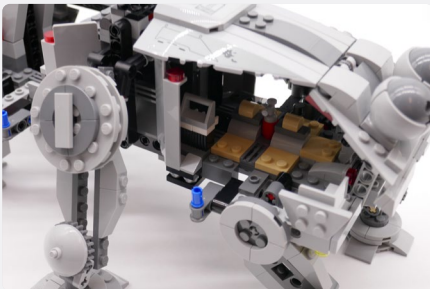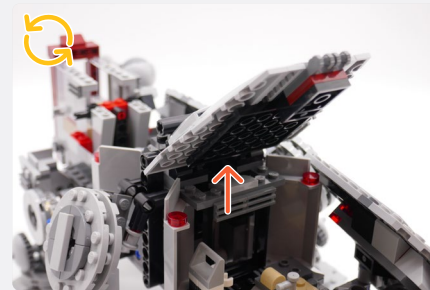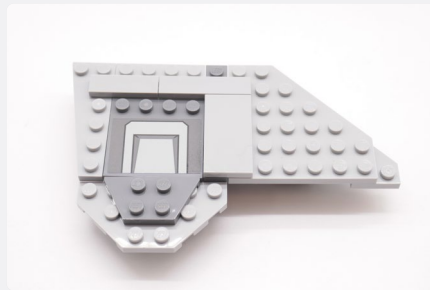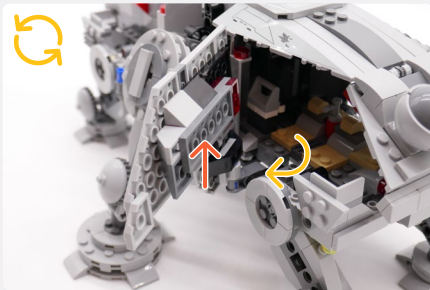

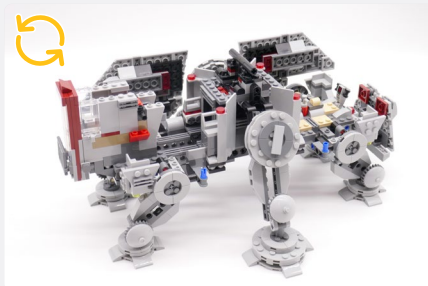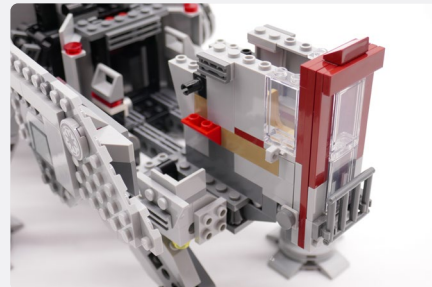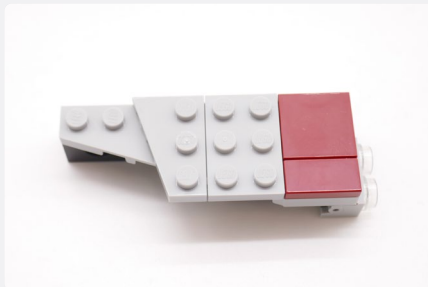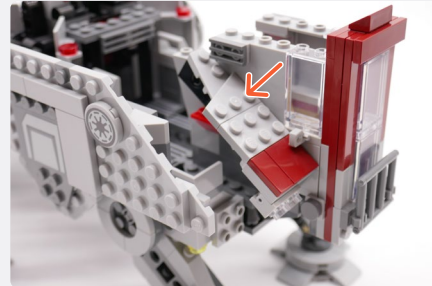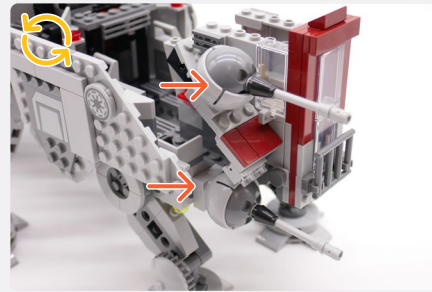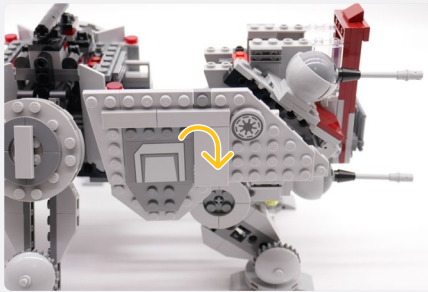

3

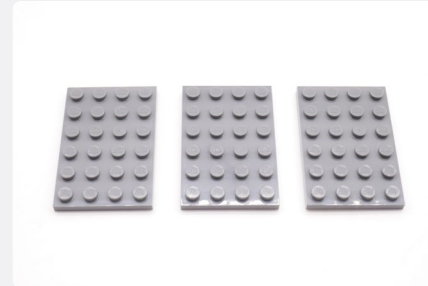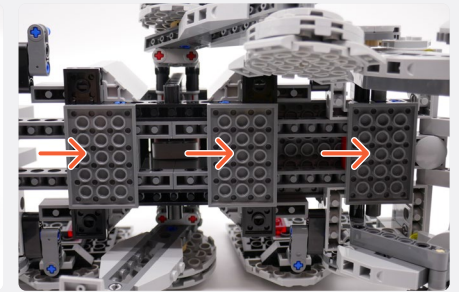


4







Blue 30cm Bit Light

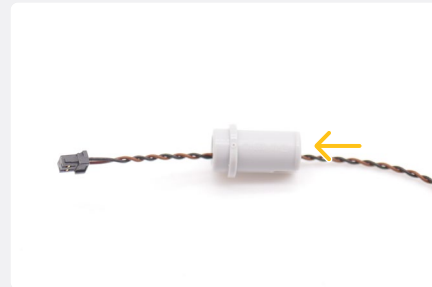



NOTE

Reconnect the Technic 1/2 Pin over the cable. Carefully push it in as far as shown. You may need to hold the bit light in the hole.

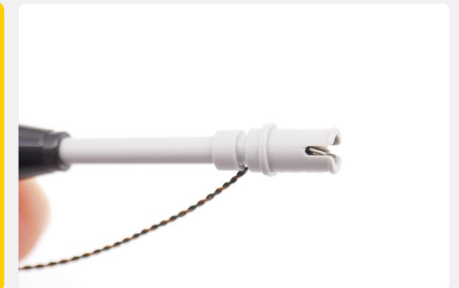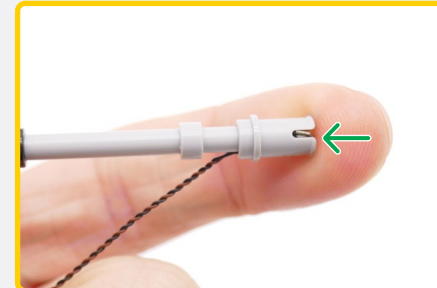

NOTE




Ensure the rod is pushed further out so the Technic Pin clips have a gap as shown. This will allow the cable to be threaded through.

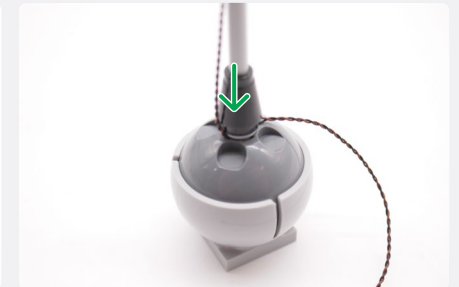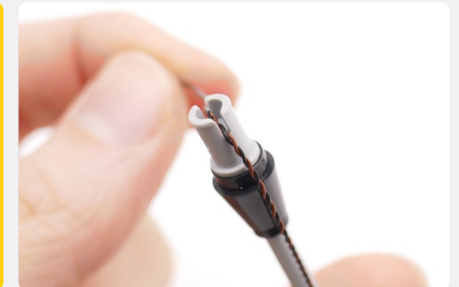


5





NOTE

Rotate the grey ball joint so it is aligned with the indicated notch in between the circles.




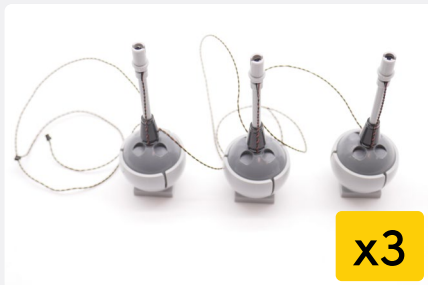
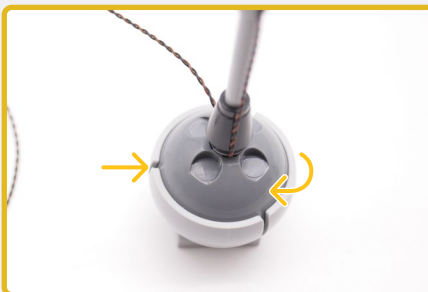
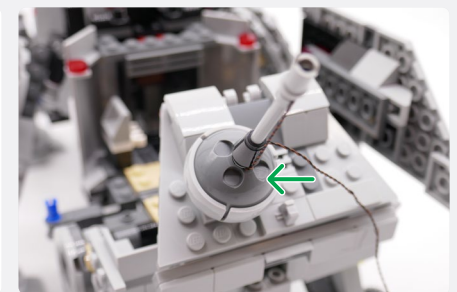

6

NOTE

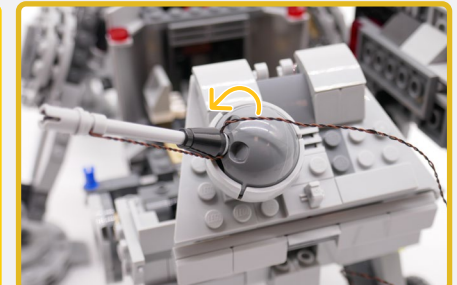For the turrets to still have the ability to rotate, turn the turret so there is enough slack.

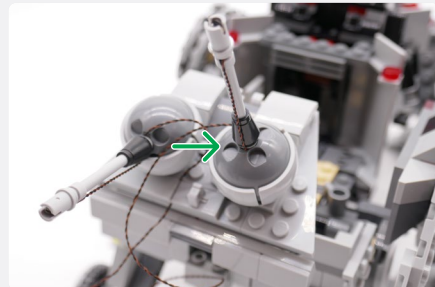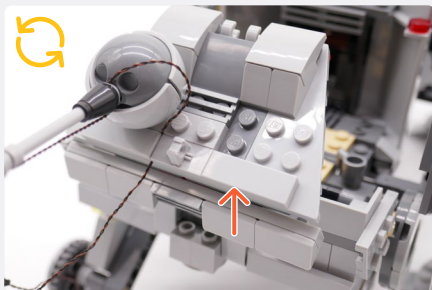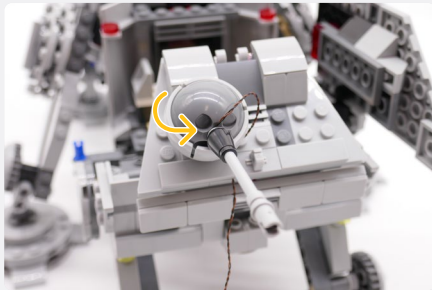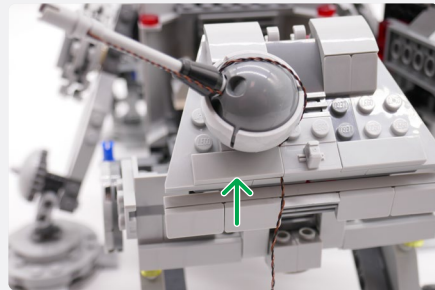


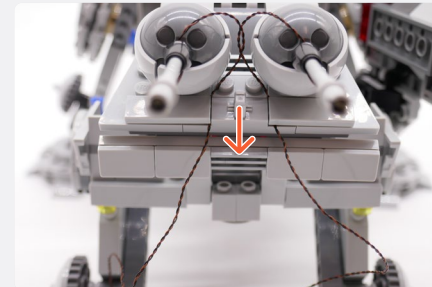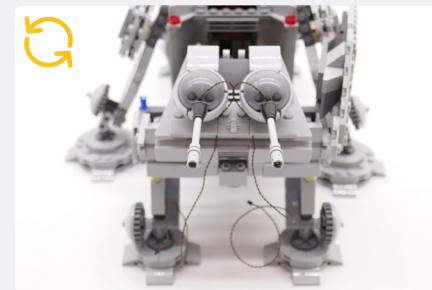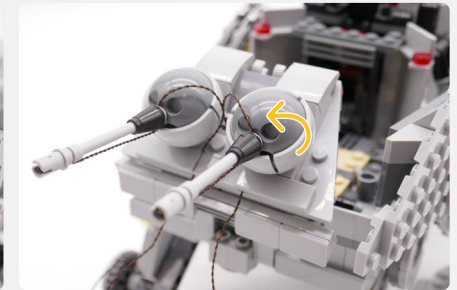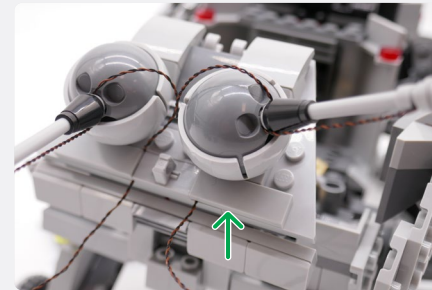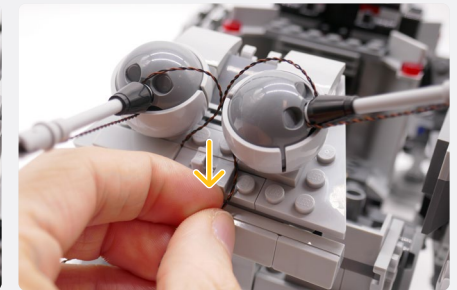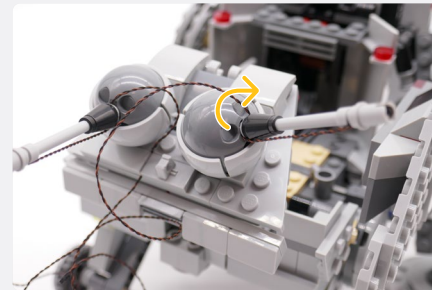

7



8





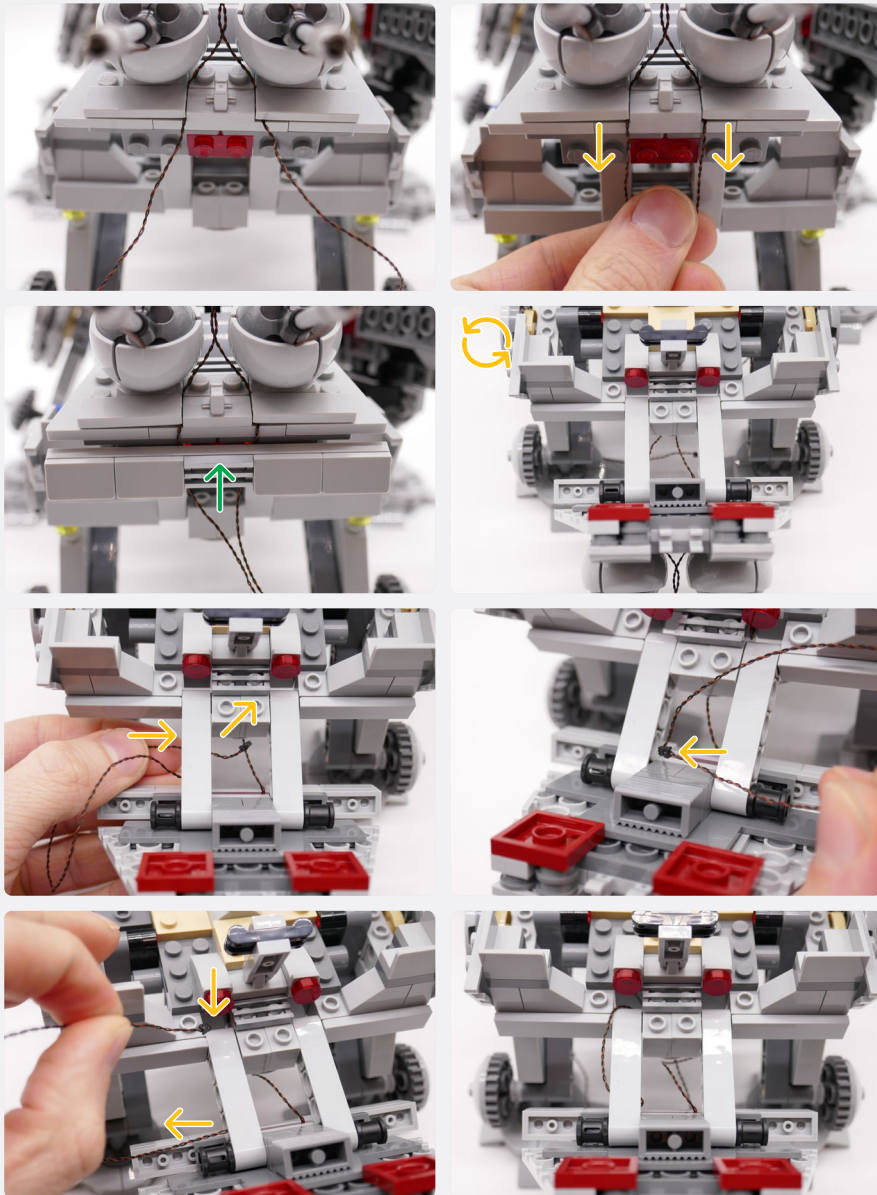


9





NOTE

Thread the cable from the right turret through the gaps

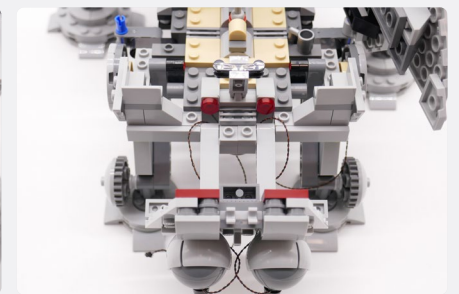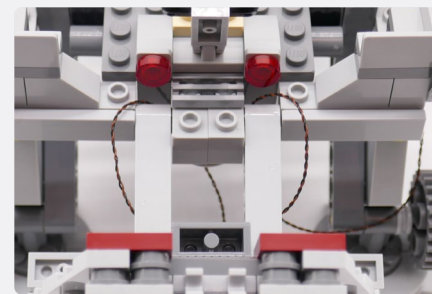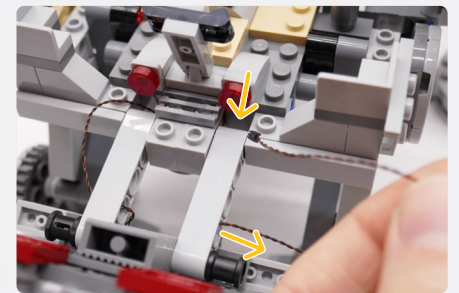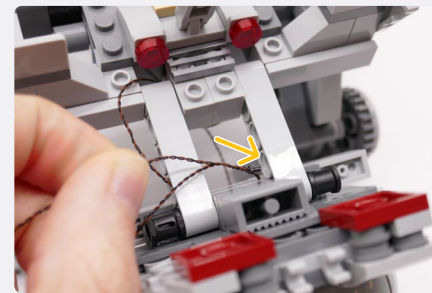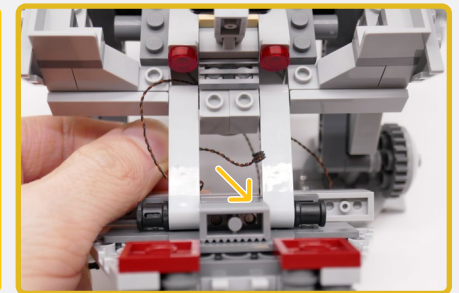


10

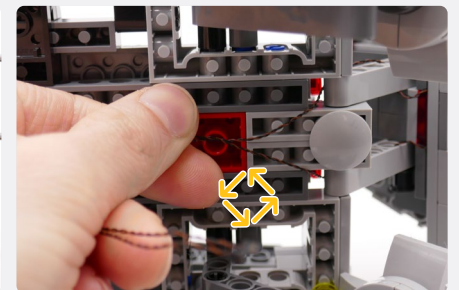









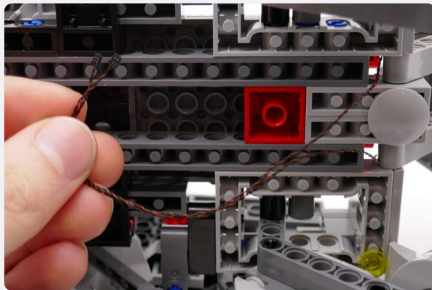


Gun Effects Board











11



NOTE
Connect the two Blue 30cm Bit Lights to the second and third "OUT" ports of the Gun Effects Board.

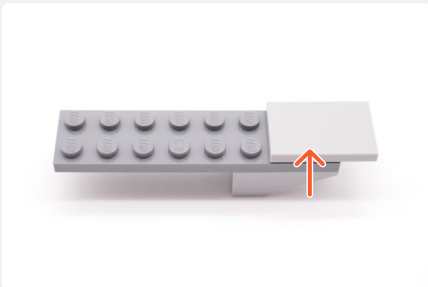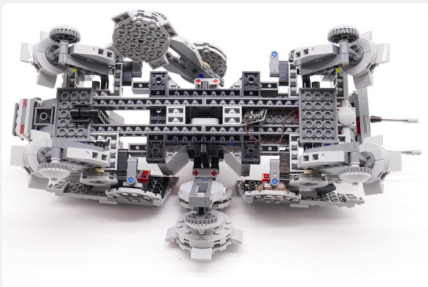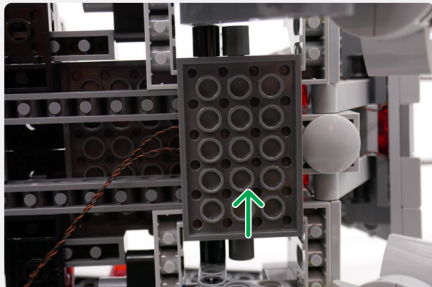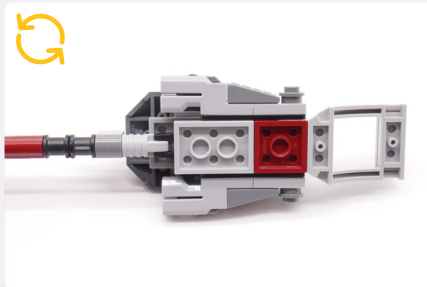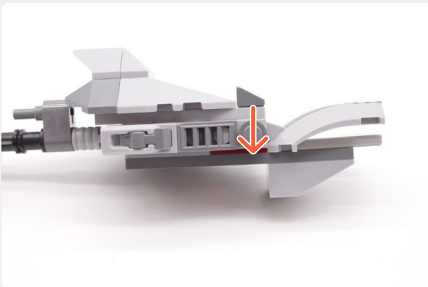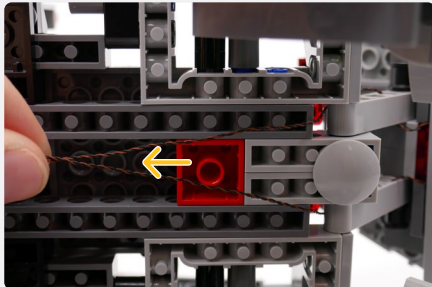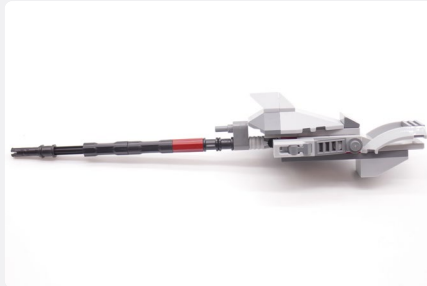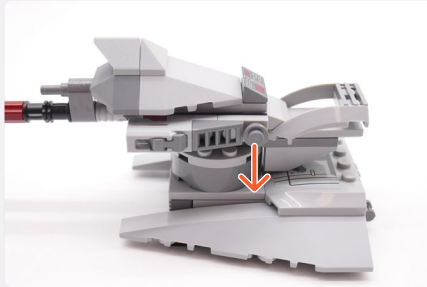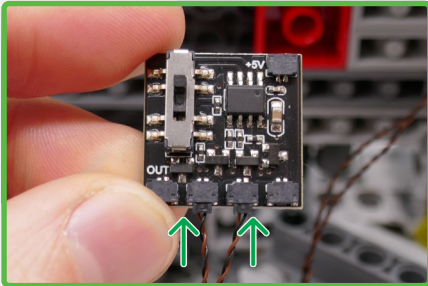

12

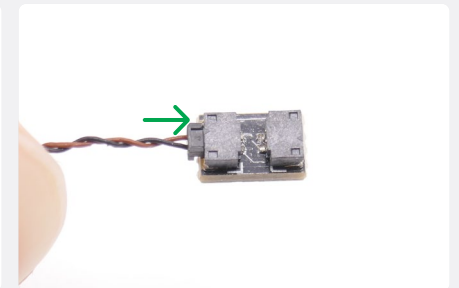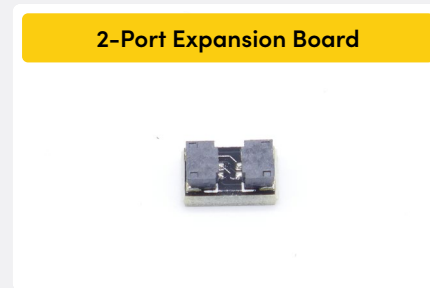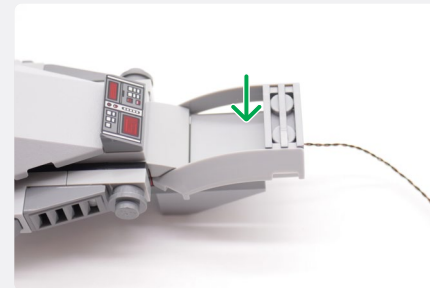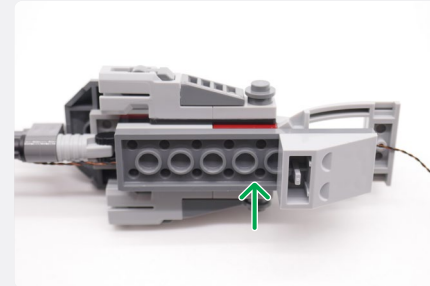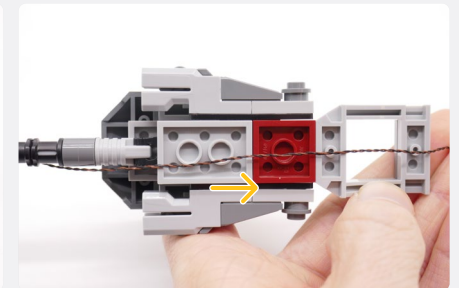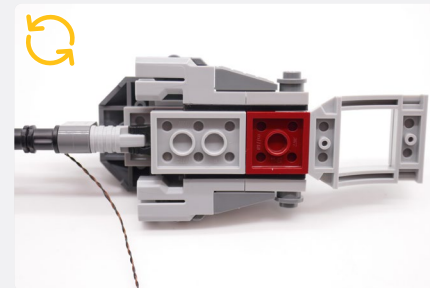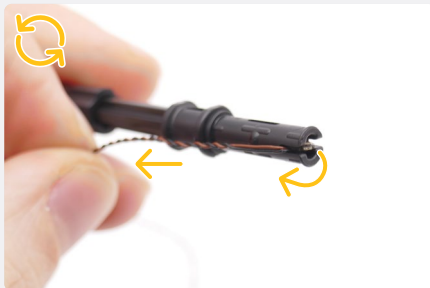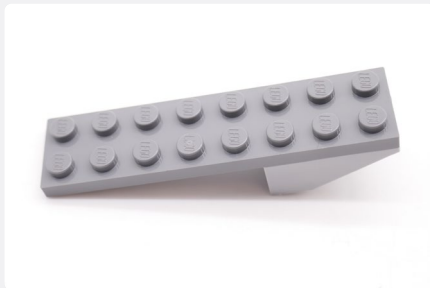





15cm Connecting Cable

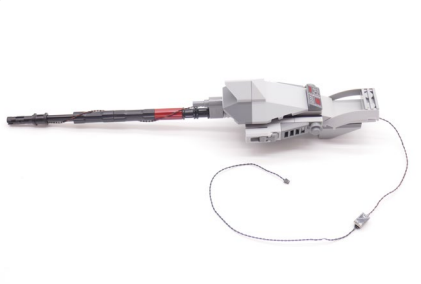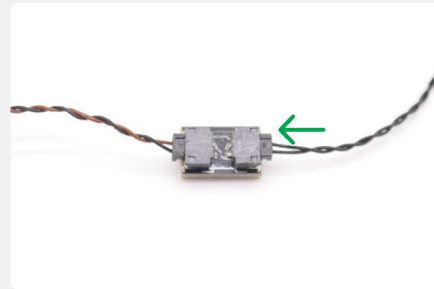







Red Strip Light



15cm Connecting Cable

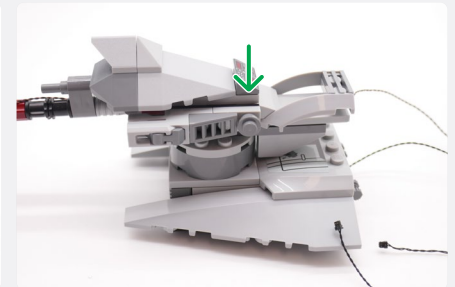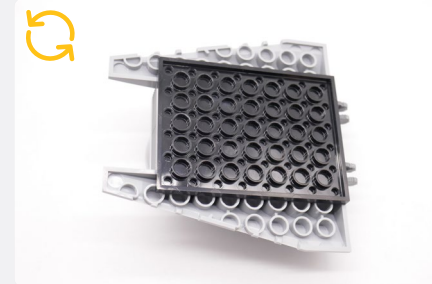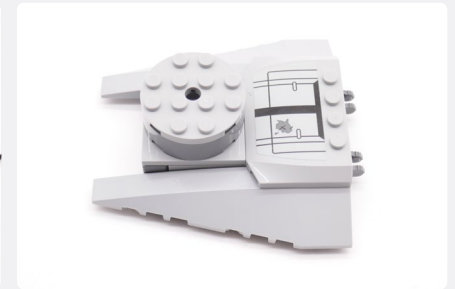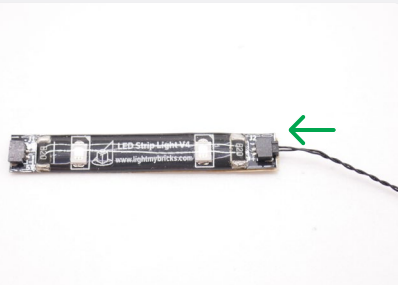


14

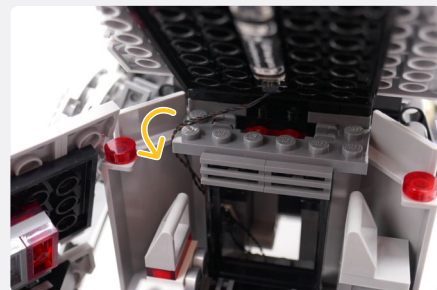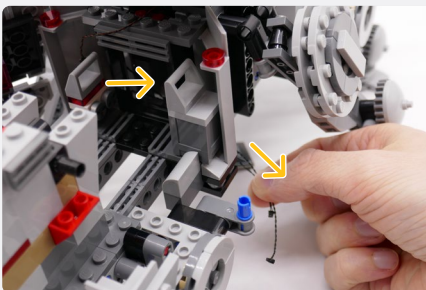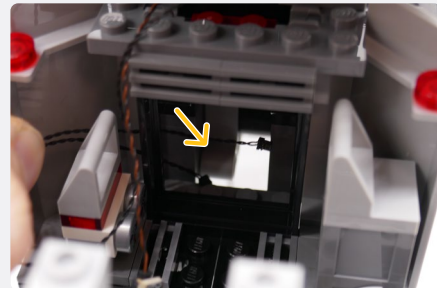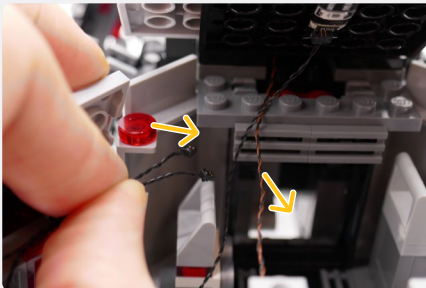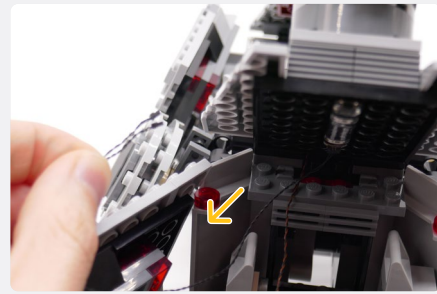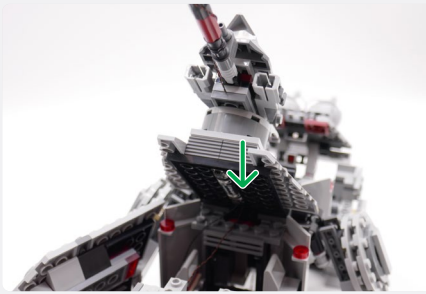


NOTE

If you wish to rotate the turret after completion, allow the indicated amount of slack in the cable.

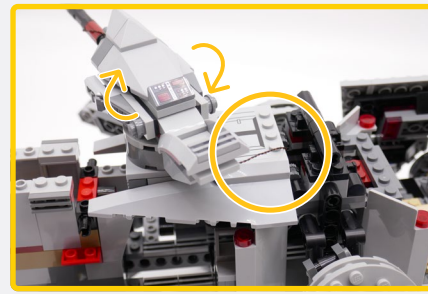


15

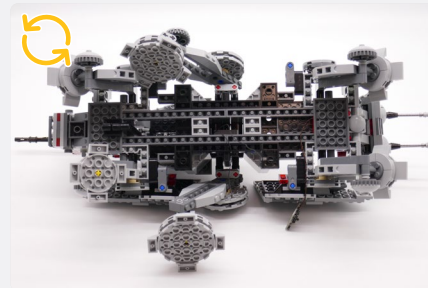



NOTE

Take the Blue 30cm Bit Light cable connected to the 2-Port Expansion and 15cm Connecting Cable.

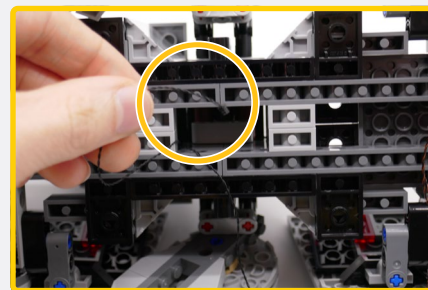


NOTE

Connect the Blue 30cm Bit Light connected to the 2-Port Expansion and 15cm Connecting Cable to the "OUT" port 4 of the Gun Effects Board.

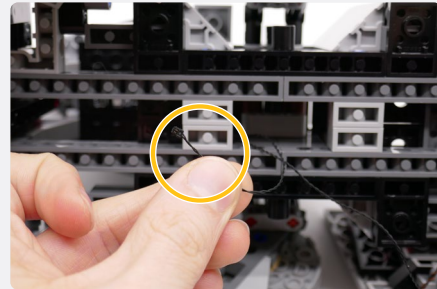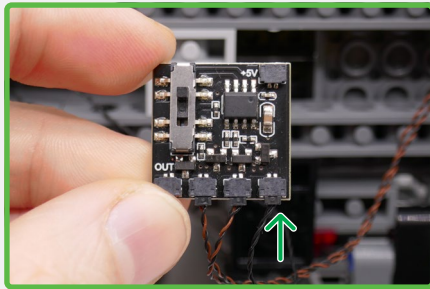

8-Port Expansion Board

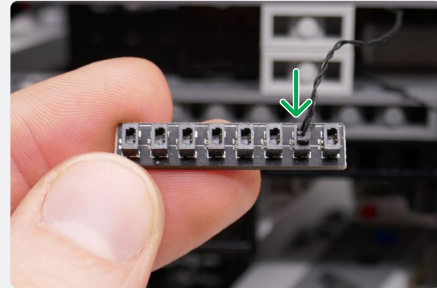

NOTE




Connect the 5cm Connecting Cable into "IN" port of the Gun Effects Board.




5cm Connecting Cable




6-Port Expansion Board

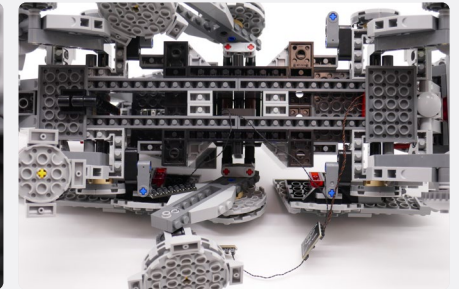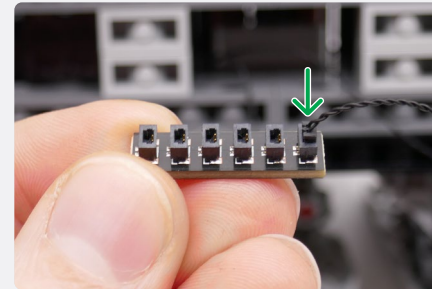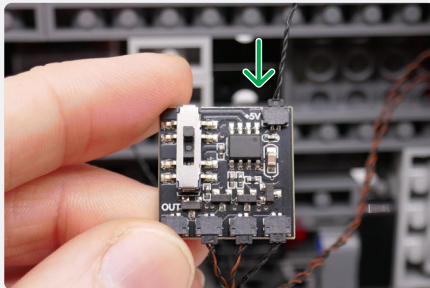









Red Strip Light

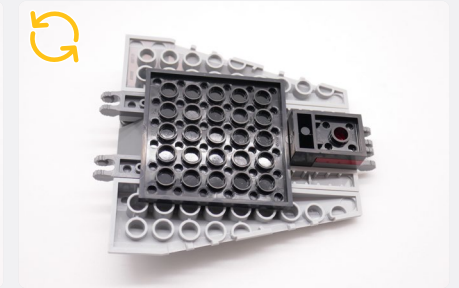



15cm Connecting Cable

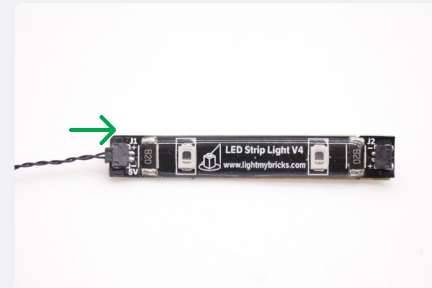


16

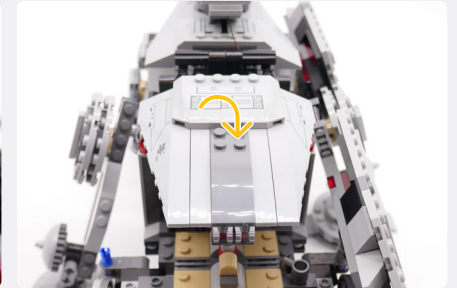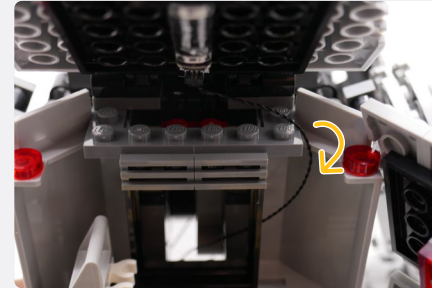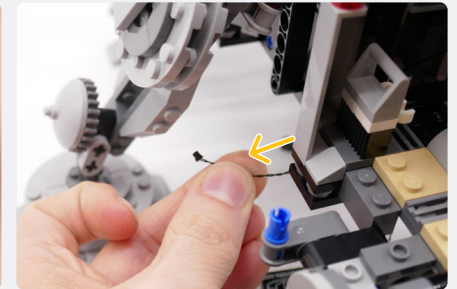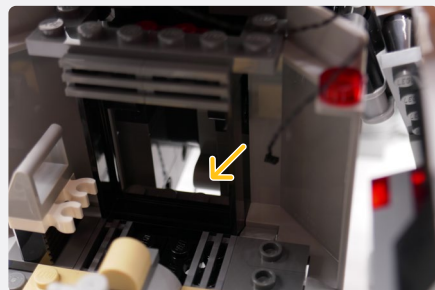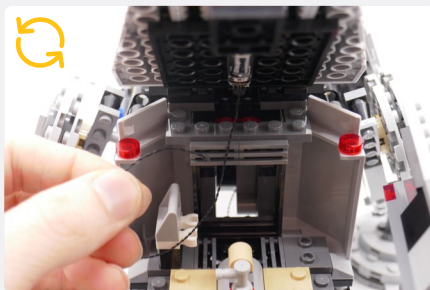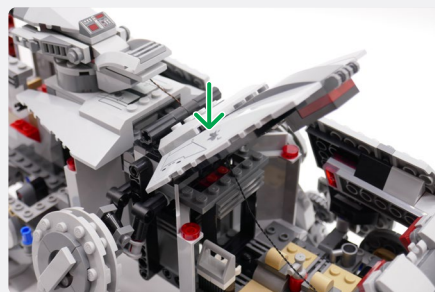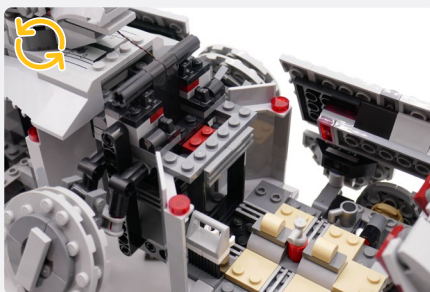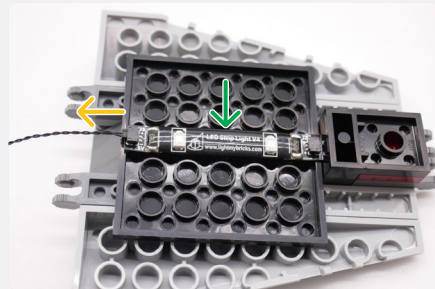




18

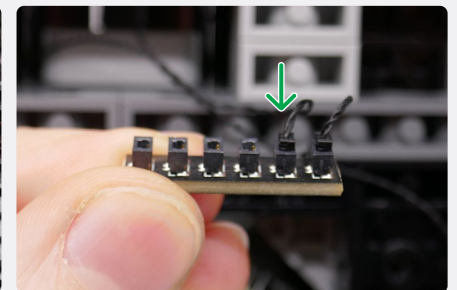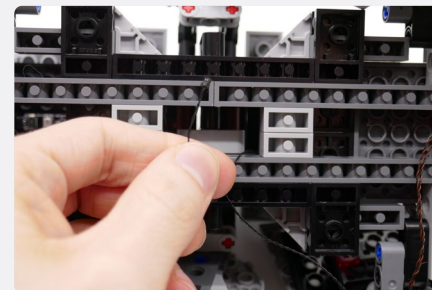


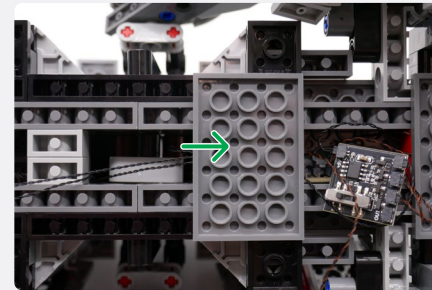
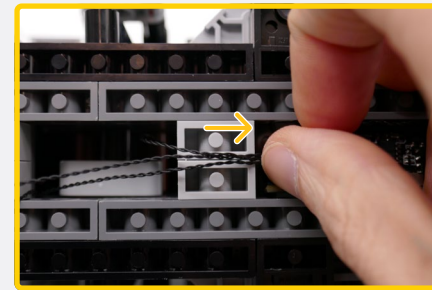
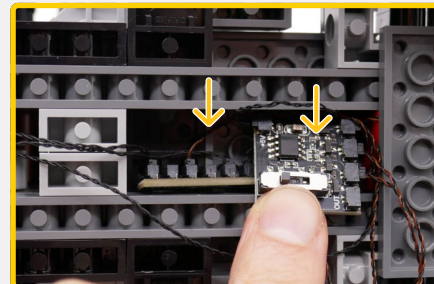
15cm Connecting Cable

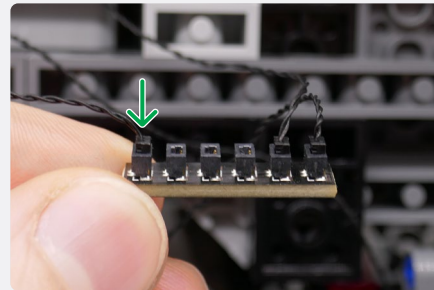


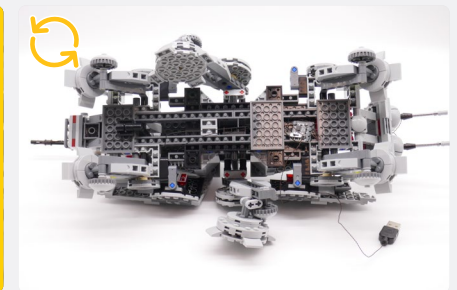
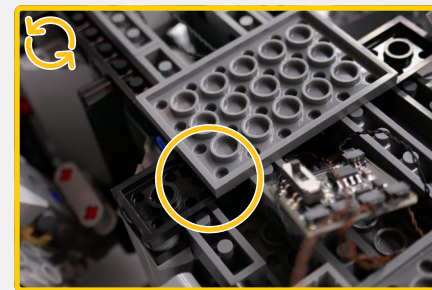
USB Power Cable

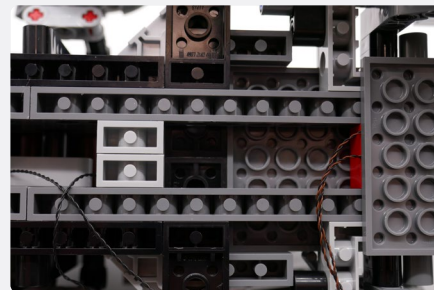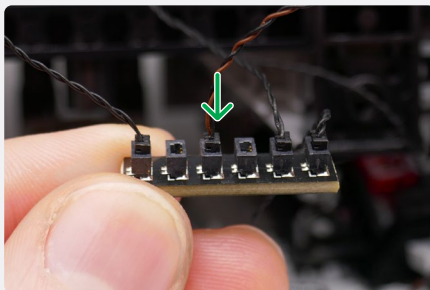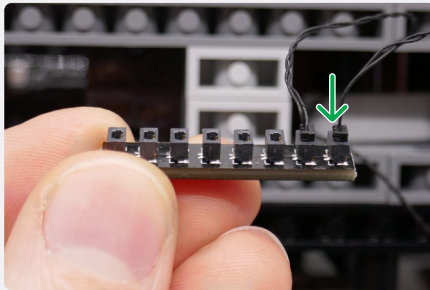



 **NOTE**
Position the 6-Port Expansion Board and the attached Gun Effects Board in the right side gap. Excluded the USB Power Cable from securing the cables



 **NOTE**
Ensure the grey plate is properly connected to the other studs.





19

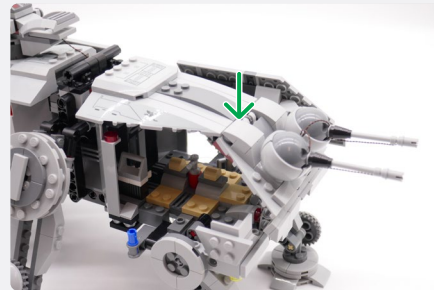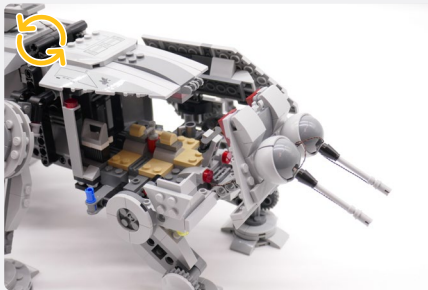


NOTE

Connect to a 5V USB Power Bank, 5V USB Wall Adaptor, or USB to AA Battery Pack (sold separately)








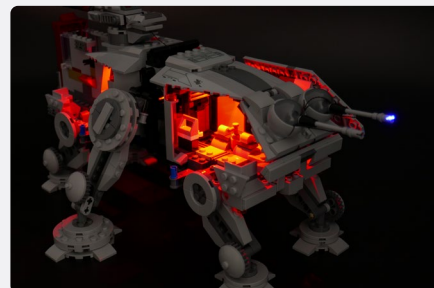
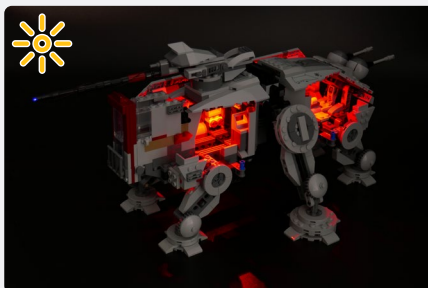


20

! If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section. i

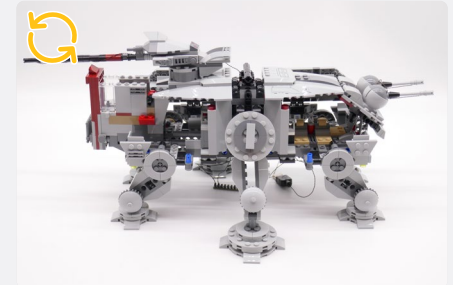


Cool White 15cm Bit Light

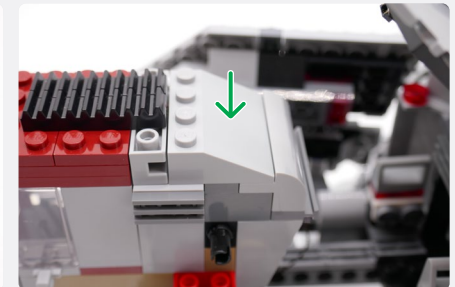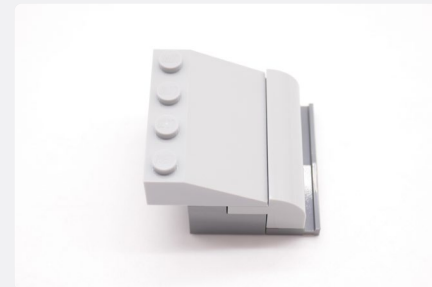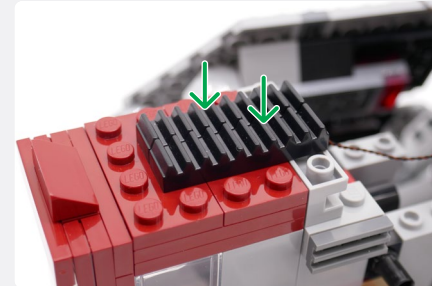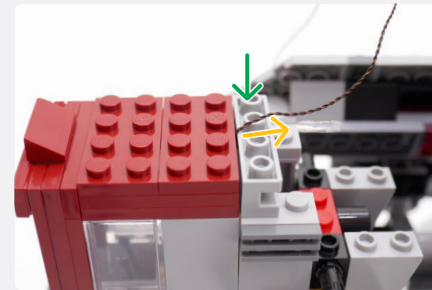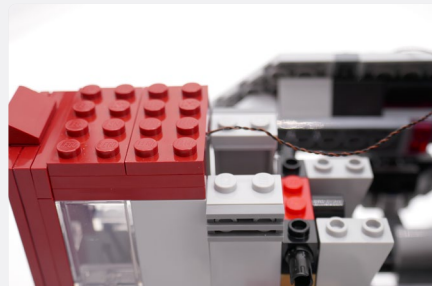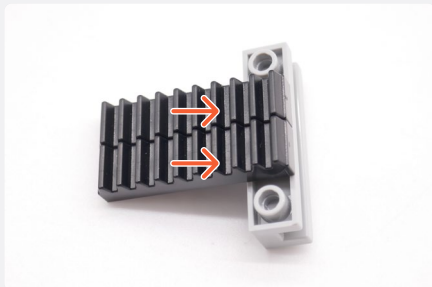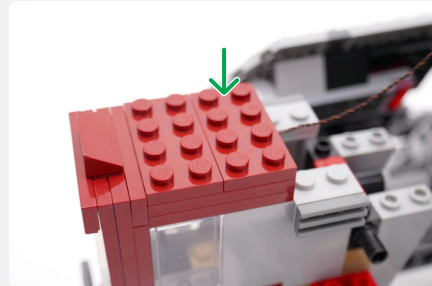
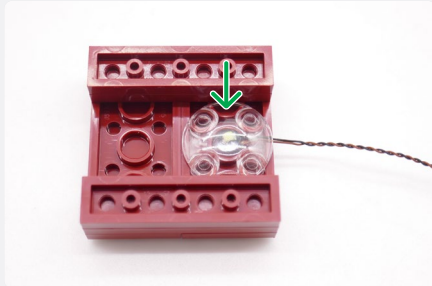
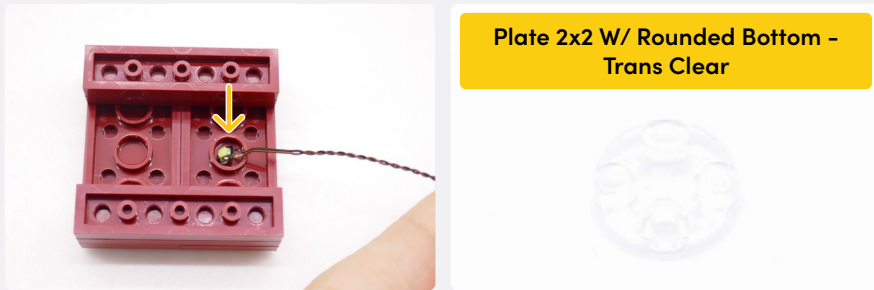


NOTE

Thread the cable below AT-TE Walker.


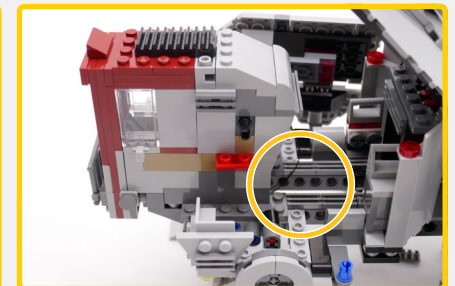


21

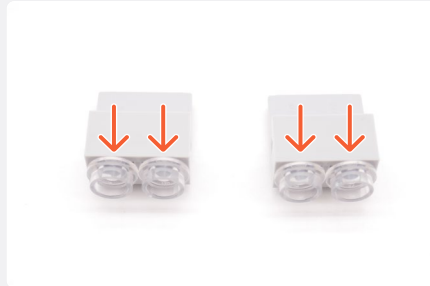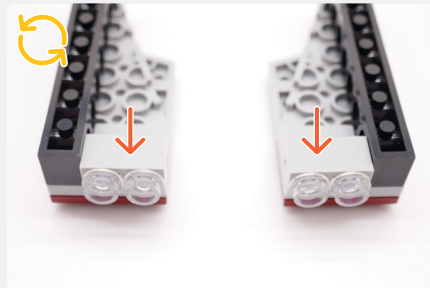
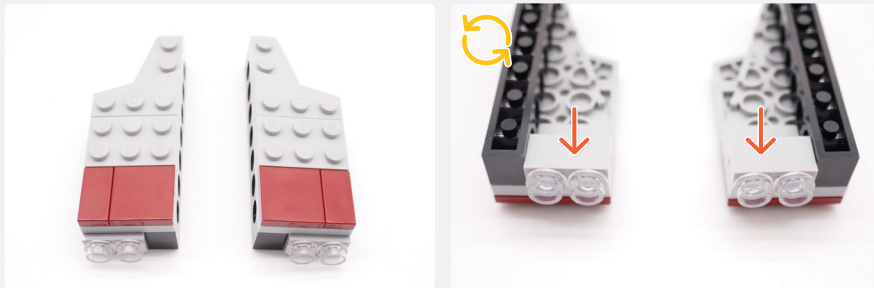


Bracket 1x2-1x2 - Black



Cool White 15cm Bit Light

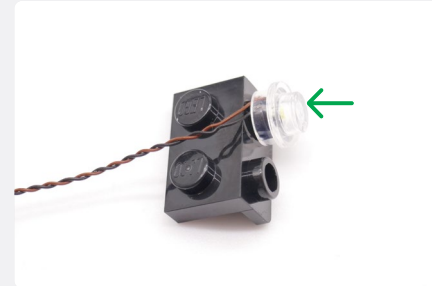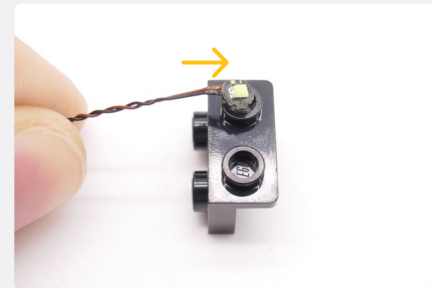


Cool White 15cm Bit Light

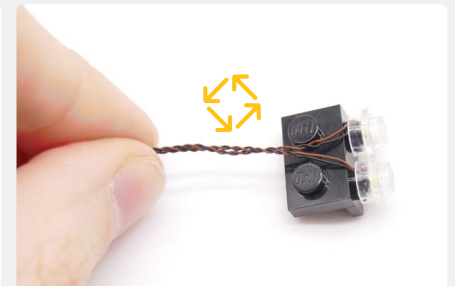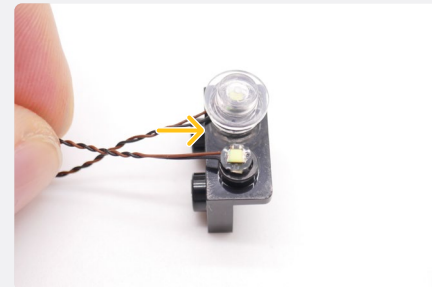


23

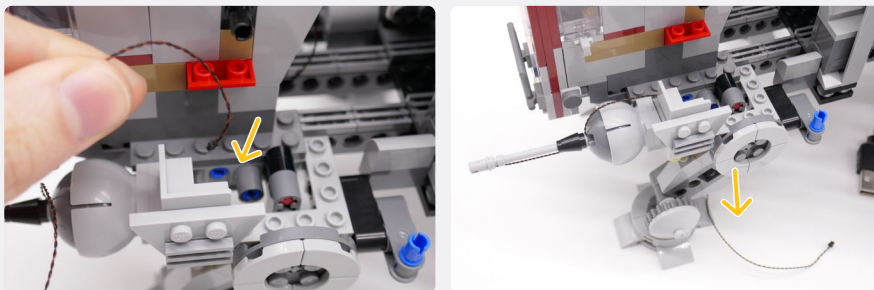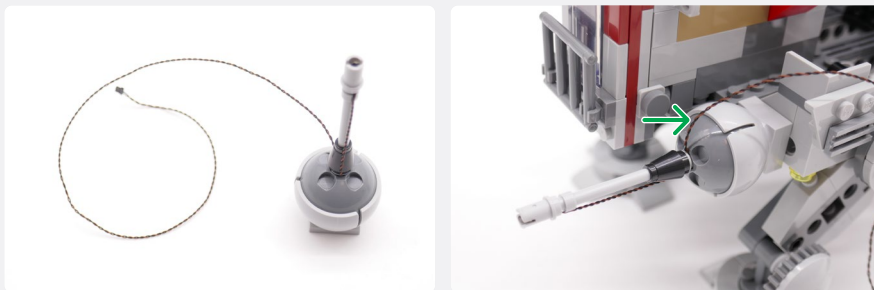

24



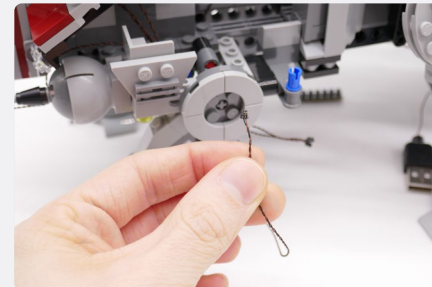



Gun Effects Board



NOTE


Connect the Blue 30cm Bit Light to "OUT" port 3 of the Gun Effects Board.

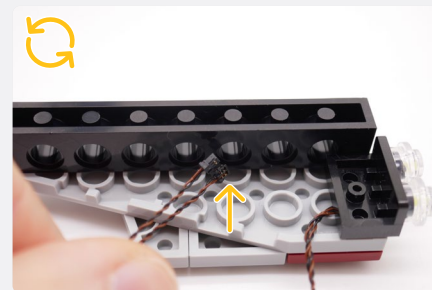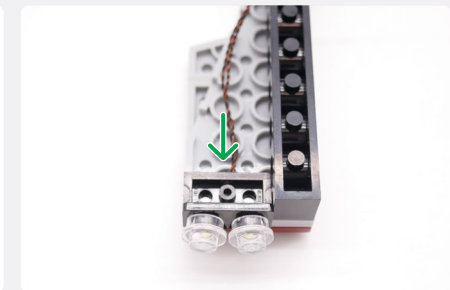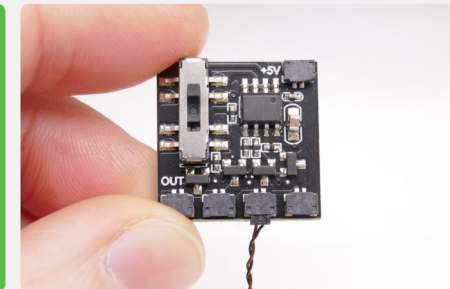

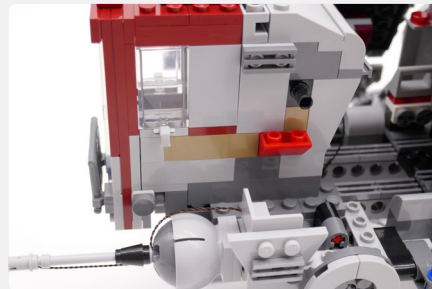


NOTE

Take the single Blue 30cm Bit Light from the top turret.




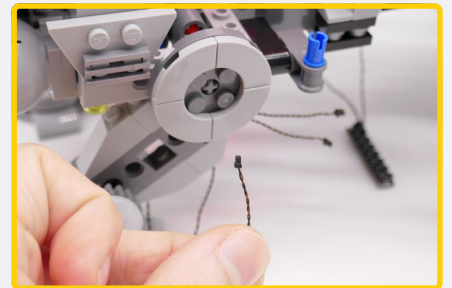


NOTE




Connect the Blue 30cm Bit Light to "OUT" port 2 of the Gun Effects Board.

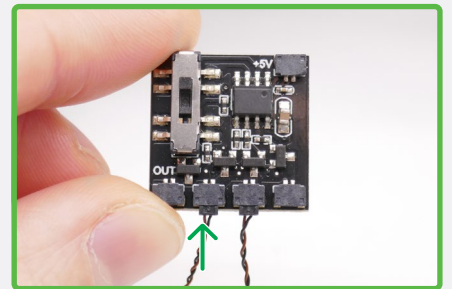


25







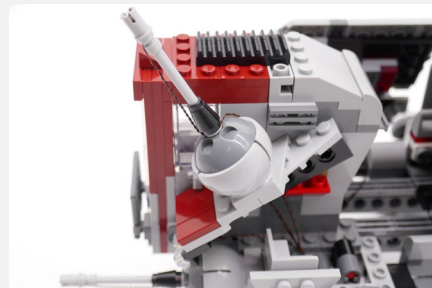
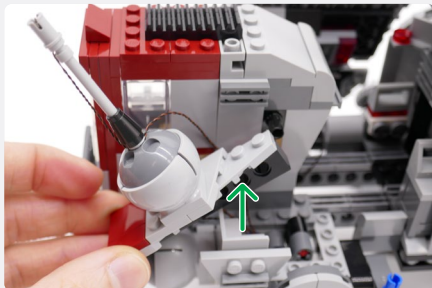
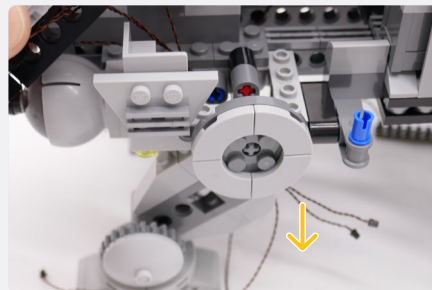
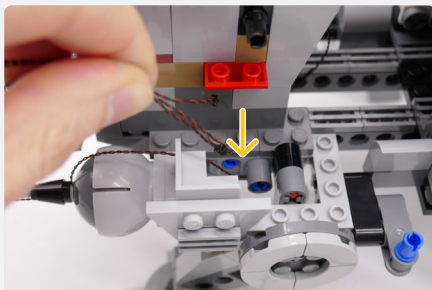


26

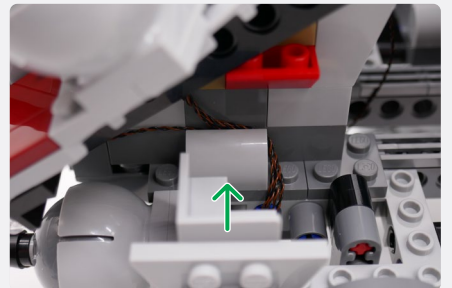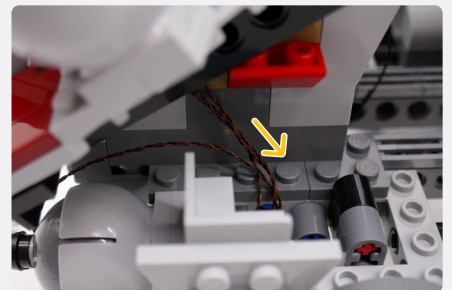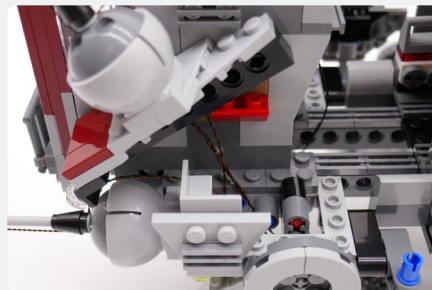

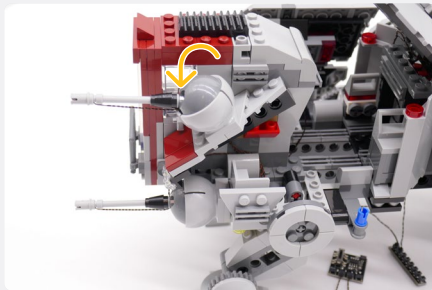


27

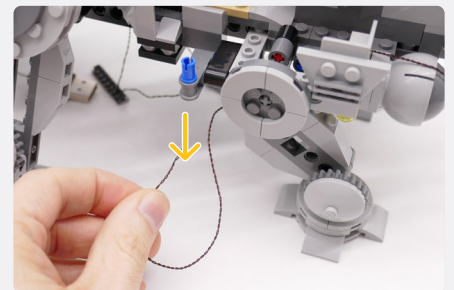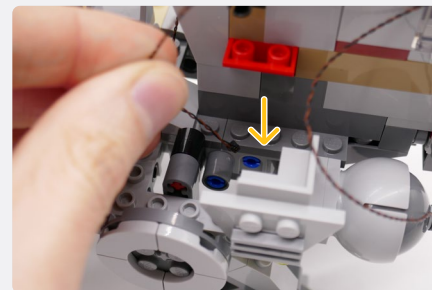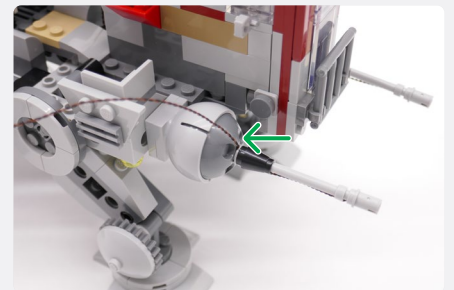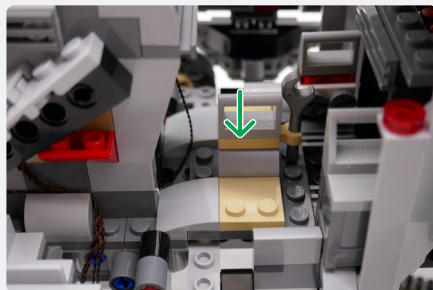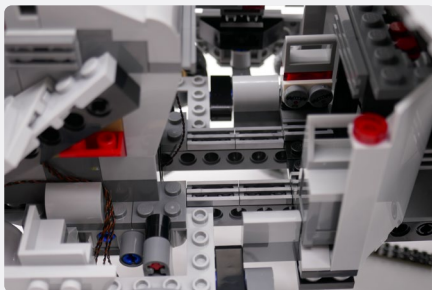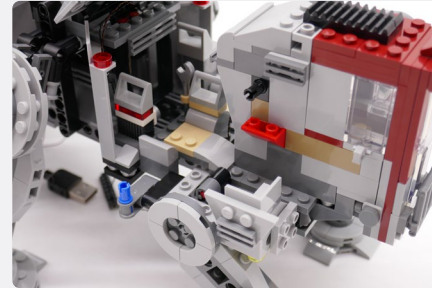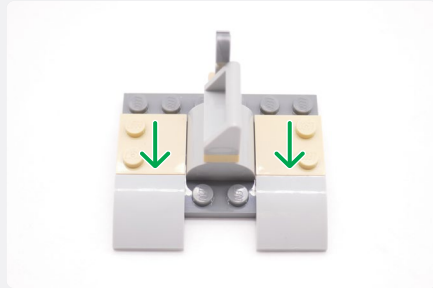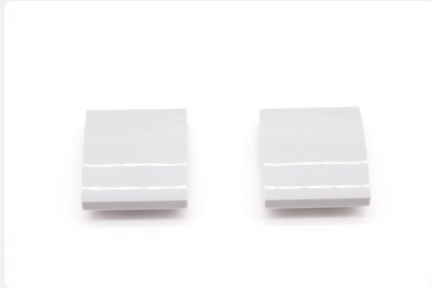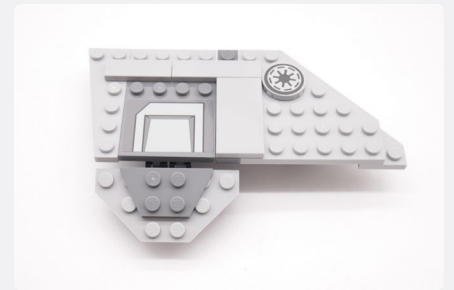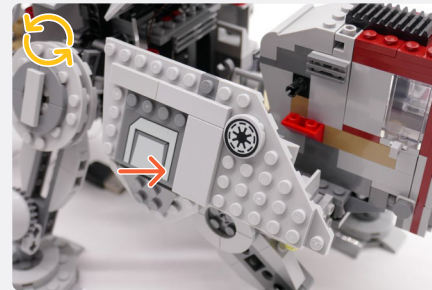







NOTE

Connect the Blue 30cm Bit Light to "OUT" port 1 of the Gun Effects Board.

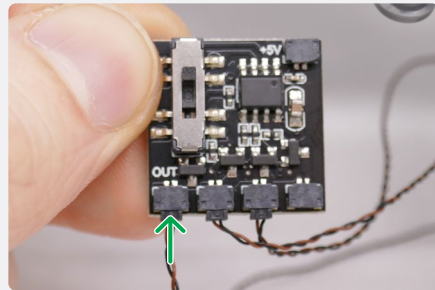


28

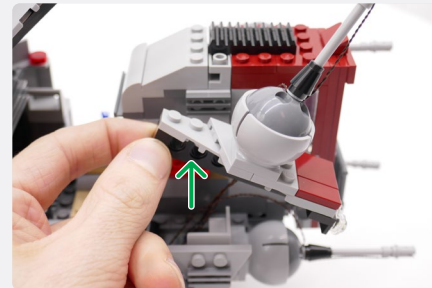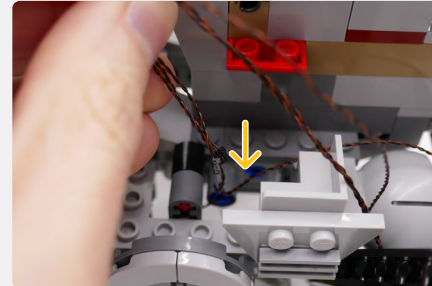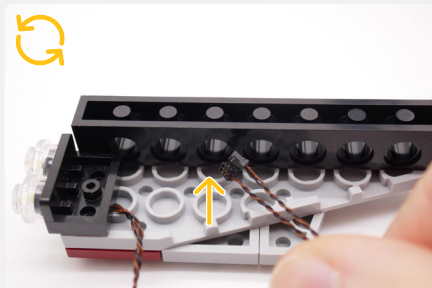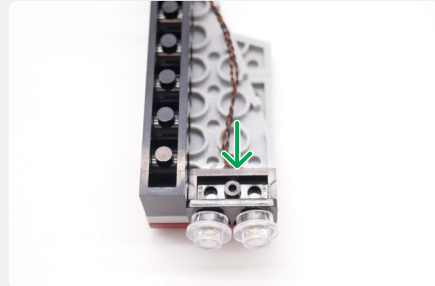


NOTE


Connect the Blue 30cm Bit Light to "OUT" port 4 of the Gun Effects Board.

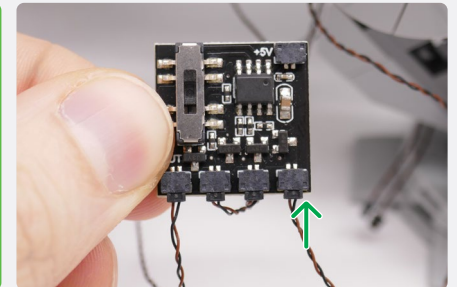

29





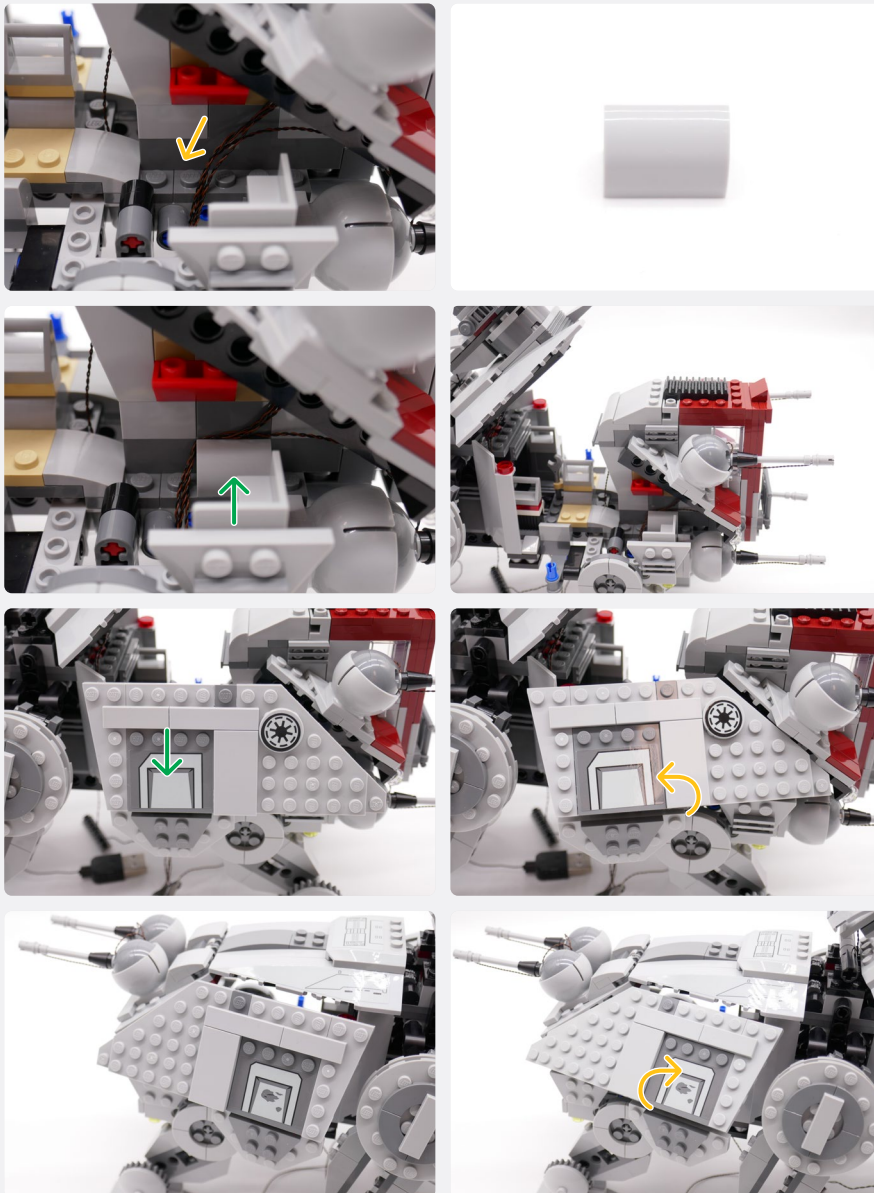


30

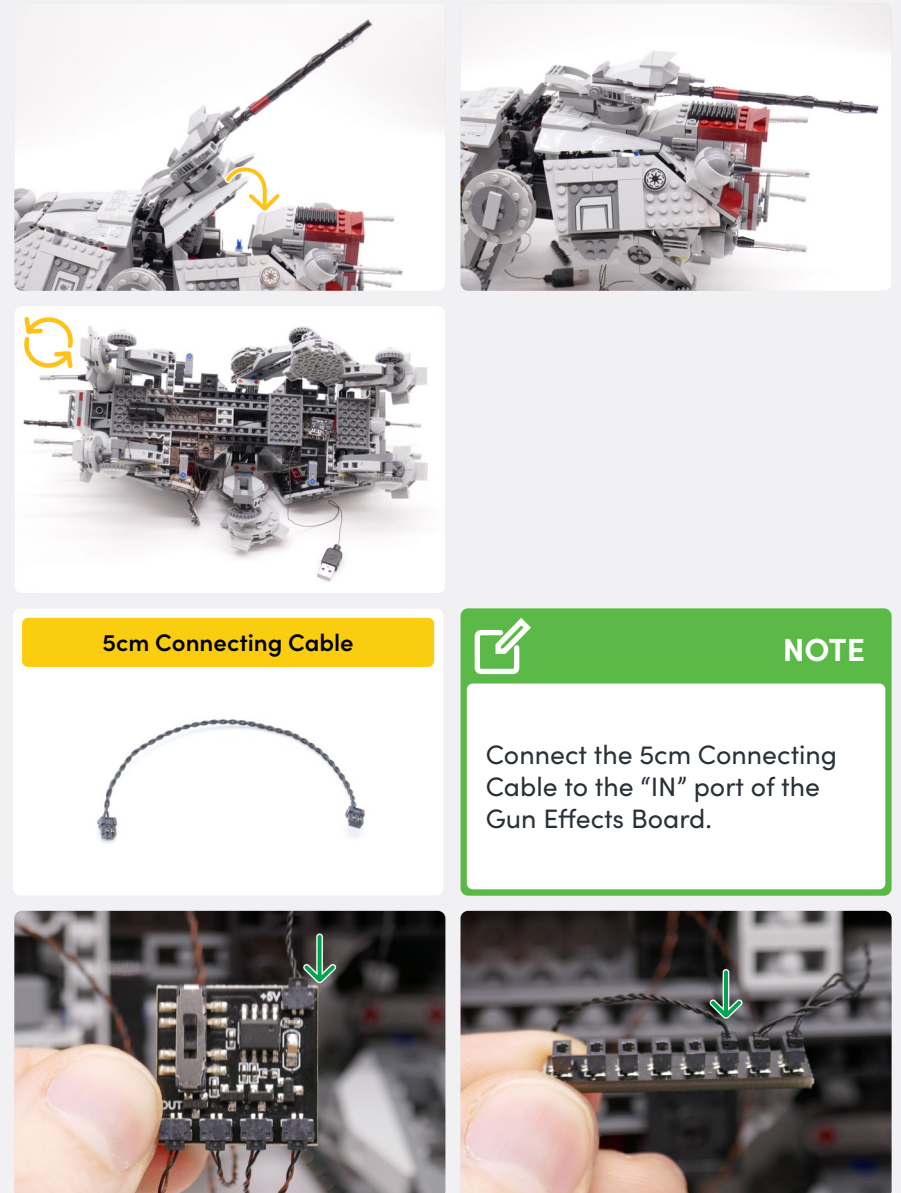


NOTE






Connect all 5 remaining Bit Lights to the 8-Port Expansion Board.

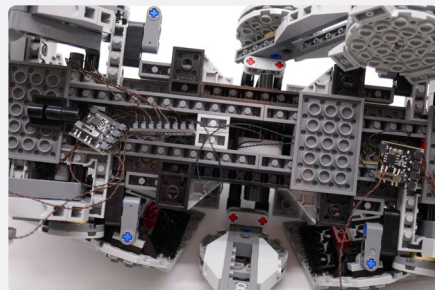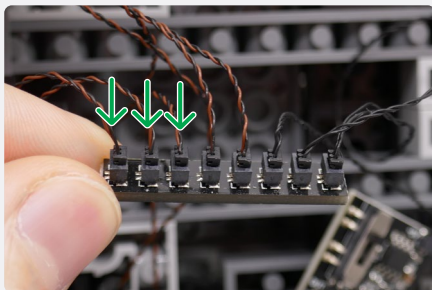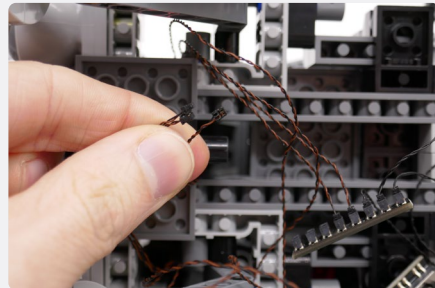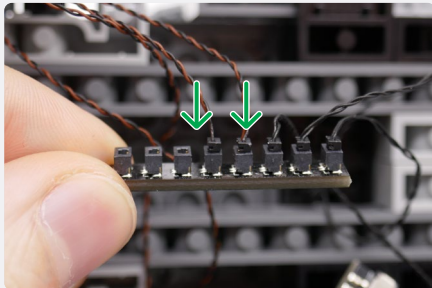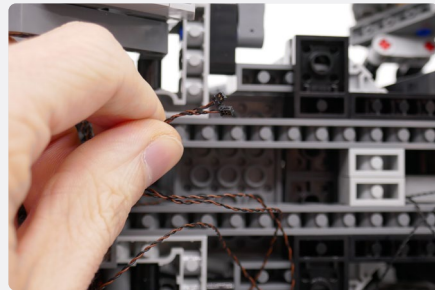










31

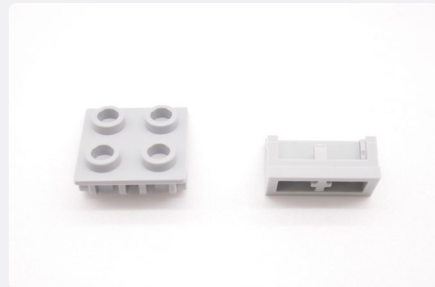


32

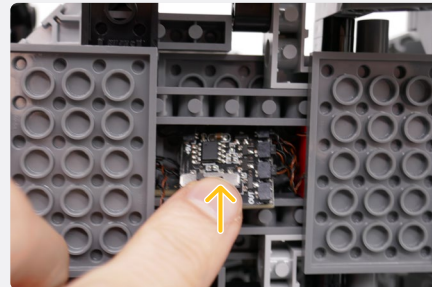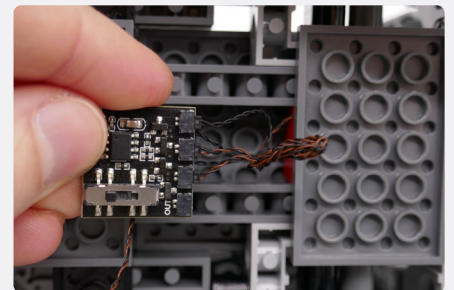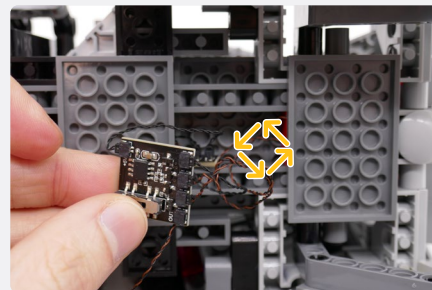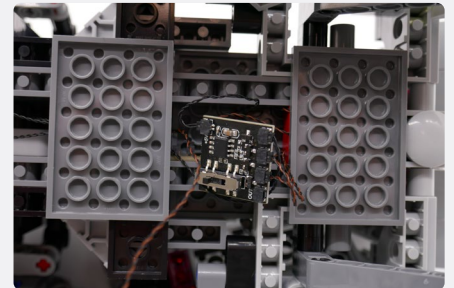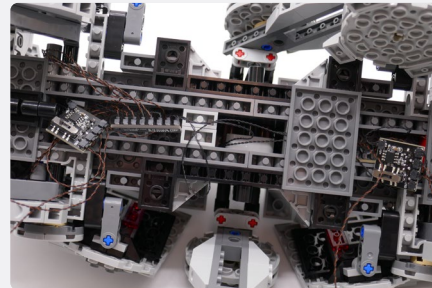


33

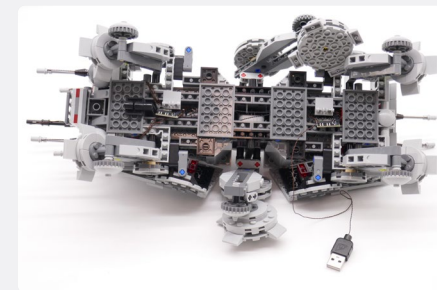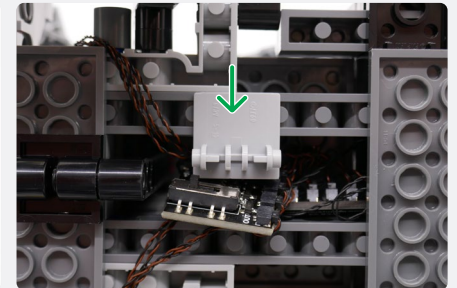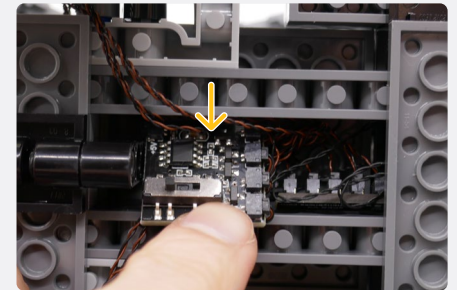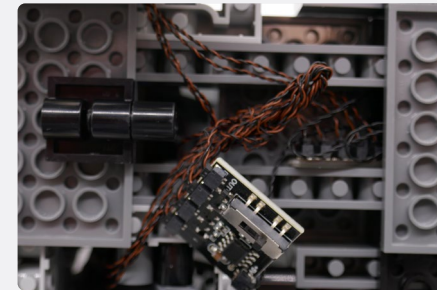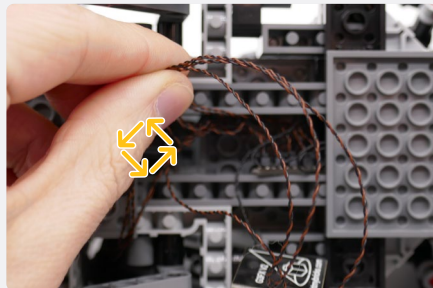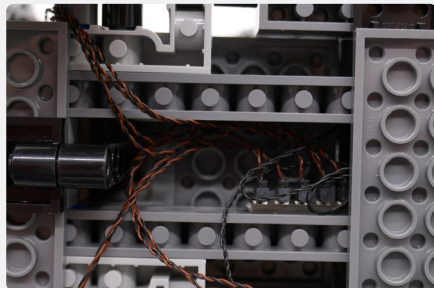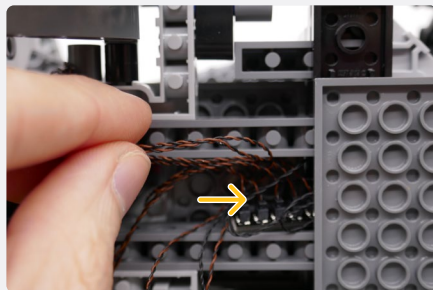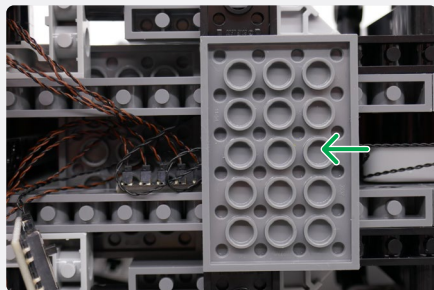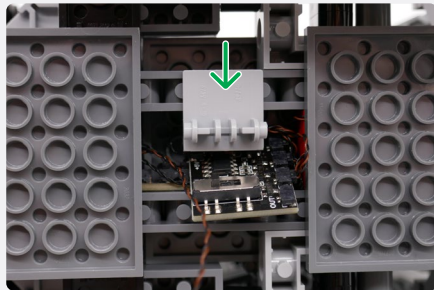


34

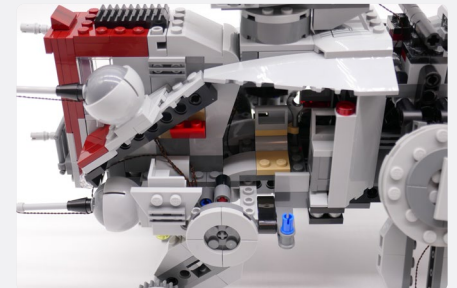

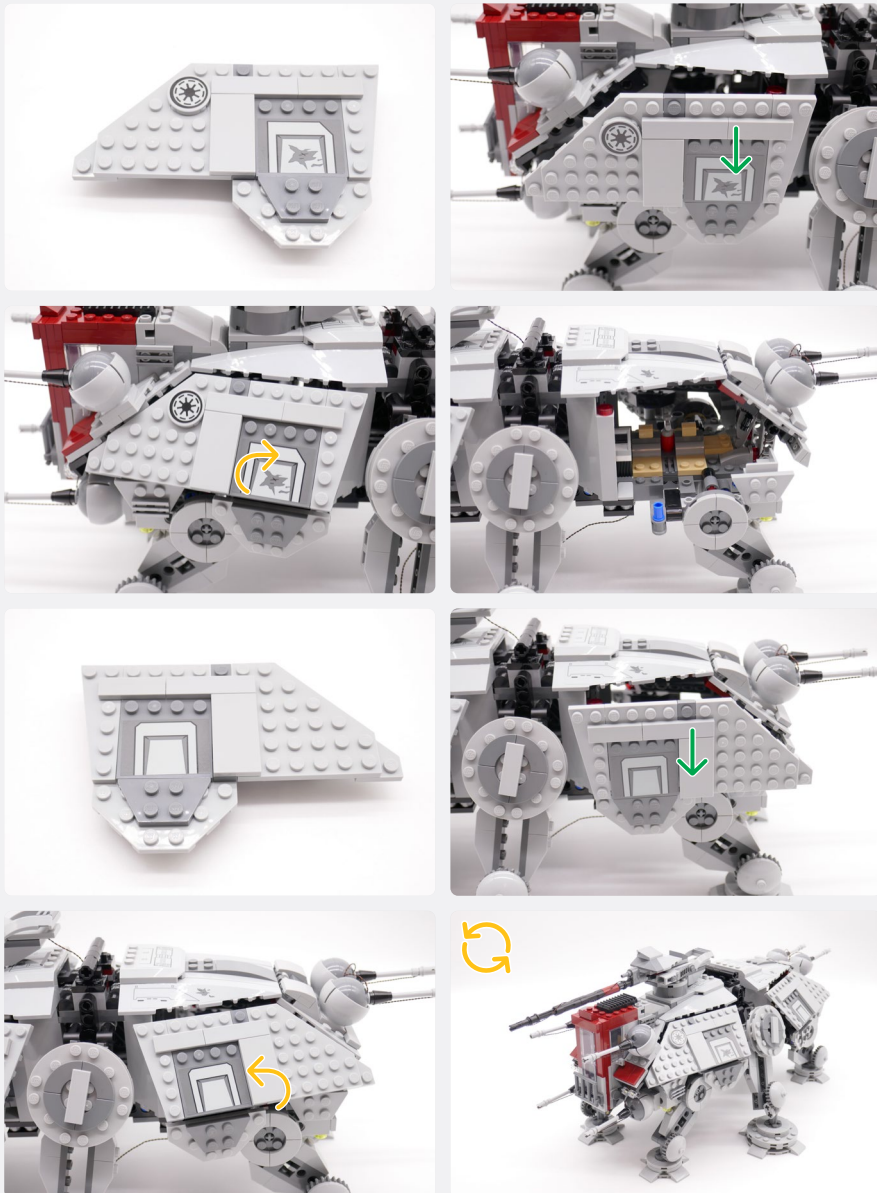

NOTE

Connect to a 5V USB Power Bank, 5V USB Wall Adaptor, or USB to AA Battery Pack (sold separately)

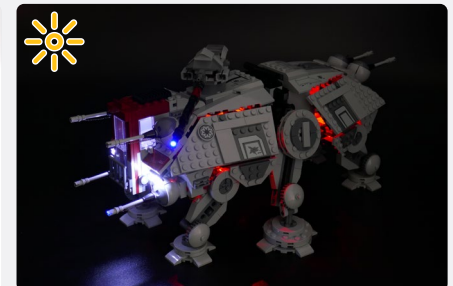

! If you experience any issues with the lights not working and suspect an issue with a component, please try a different port on the expansion board to verify where the fault lies (with the light or expansion board). To correct any issues with expansion board ports, please view the section addressing expansion board issues in our troubleshooting section. **!**

FINAL PRODUCT

This finally completes installation of the Light My Bricks

LEGO® AT-TE Walker 75337 Light Kit.





TROUBLESHOOTING

Light My Bricks lighting kits contain individual components that are very small and can be easily damaged if not handled correctly.

To prevent unnecessary damage to components, we highly recommend that the User Guide section, **“Important things to note”** is read carefully. Follow the handling procedures in the User Guide to help prevent faults and damages to your Light My Bricks components.

If you are experiencing issues with your Light My Bricks set, watch our troubleshooting video or read on for a list of common causes to help you troubleshoot.

Troubleshooting

Firstly, ensure that the batteries have power using a battery charge gauge.


If the batteries have no power, replace the batteries.

If the batteries still have power, check to see if the batteries have been inserted correctly into the battery pack.

Check for AA batteries using the AA battery pack

Inside the battery pack are symbols indicating which direction the AA battery should be inserted. The flat side of the battery should be paired with the spring side of the battery pack.

If the batteries have been installed correctly and your kit still isn't operating correctly, the next step is to check the wiring.

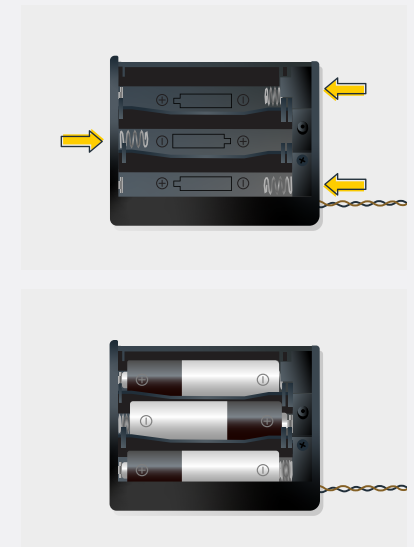

Troubleshooting

Check Your Wires



In order for Light My Bricks components to fit in between and underneath LEGO® bricks, the components need to be very small. Due to this nature, Light My Bricks components can be easily damaged when not handled correctly.

Be careful when removing unpacked components out of the packaging and ensure not to forcibly pull at the wires as this can damage the soldering that attach the wires to the LEDs.

If the wiring is detached from the LED itself, the light will not operate.

When connecting lights to your LEGO® set, check that there are no pinched wires underneath or in between bricks and plates.

When the wires are pinched and the exposed wires are touching each other, this can cause a crosswire and the lights to not function correctly.

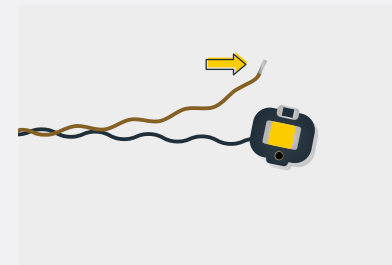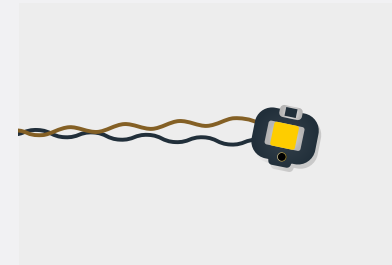


Troubleshooting

Check Your Expansion Board Ports / Strip Light Ports / Effects Board Ports

It is important to note that connectors can only be inserted to the expansion board, strip light, or effects board ports in one direction.

Forcibly inserting connectors in the incorrect direction will result in damaging the pins inside each of the ports on your component board.



Not only will a light connected to the damaged port not work, but if the pins inside the port are bent to a point they are touching each other, this can result in all other lights in the system to stop working. This is a short circuit.

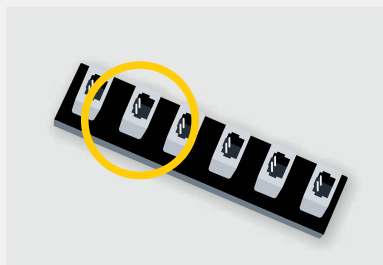

A short circuit can also result in overheating of the board, cable or batteries. If you suspect a short circuit, **DISCONNECT POWER IMMEDIATELY**. Batteries can fail, catch fire, or even explode if left connected to a short circuit for too long.

If you suspect you have a faulty component due to a bent pin, try the following steps:

If you look carefully inside each of the ports, each port contains 2 small pins that should be straight. You will be able to identify a faulty port if it has any bent pins.

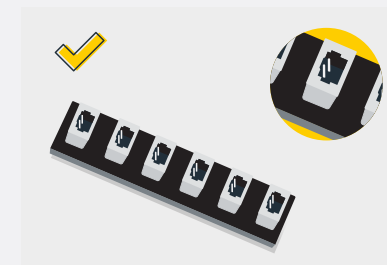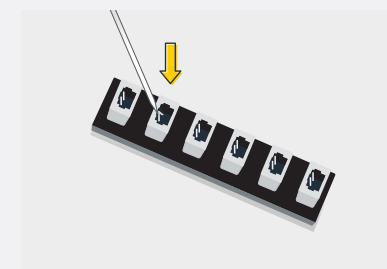



CONTACT US

If you have an enquiry regarding the online shop, our products or a general enquiry please refer to our Frequently Asked Questions webpage.

Alternatively, you can contact our Customer Services team by visiting our online support portal.

support.lightmybricks.com

We thank you for purchasing this product and hope you enjoy!



lightmybricks.com